


1:1500

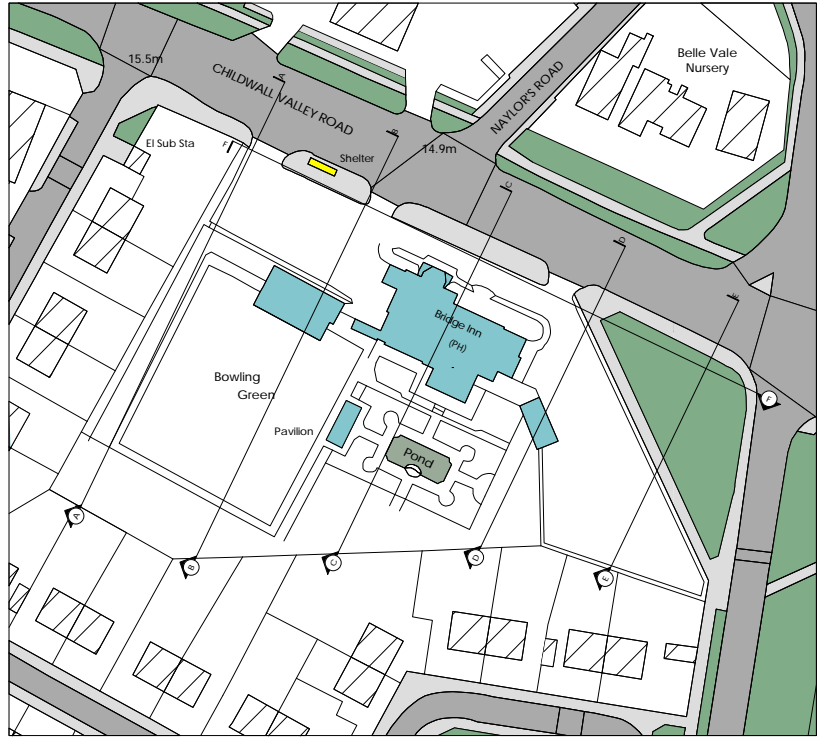

NOTES

- This drawing is copyright of Condry and Lofthouse Ltd. and may not be reproduced in any way without their specific permission.
- All dimensions are to be checked on site. Do not scale from this drawing, work to figured dimensions only. Any queries please contact the architect.

MATERIALS PROHIBITED

- Materials prohibited from use, except where used in accordance with 'Good Practice' in the Selection of Construction Materials (March 2011) or unless required by the Contract.
- high alumina cement in the structural elements
 - wood wool slates in permanent formwork to concrete
 - calcium chloride admixtures for use in reinforced concrete
 - asbestos or asbestos-containing products, as defined in the 'Control of Asbestos at Work Regulations, as amended 2006' or any other statutory modification or re-enactment thereof
 - any naturally occurring or man-made mineral fibres (for example, rock wool or slag wool) with a thickness of 3 microns or less and a length of 200 microns or less, unless they are appropriately sealed to prevent migration of fibres
 - aggregates for use in reinforced concrete which do not comply with:
 - 'BS EN 12620:2002: Properties of aggregates used in concrete'
 - 'BS EN 12139:2002: Properties of aggregates used in mortar'
 - 'BS EN 12655 (Parts 1 & 2): Properties of lightweight aggregates'Guidance on avoiding alkali-silica reaction and limitations on alkali content in BRE Digest 330 (2004) & 'Concrete Society Technical Report 30' (1999)
 - lead, lead paint or any other materials containing lead which may be ingested, inhaled or absorbed, except where copper alloy fittings also containing lead are specifically required in drinking water pipework by any relevant statutory requirement or where lead flashings or other lead roof coverings are specifically provided for in the Contract
 - urea formaldehyde foam or materials which may release formaldehyde in quantities which may be hazardous with reference to the limits set by the Health and Safety Executive
 - calcium silicate bricks or tiles
 - vermiculite unless it is established as being fibre-free: calcium silicate bricks or tiles
 - any products containing cadmium referred to in Statutory Instrument SI 2004/3111 Control on dangerous substances and preparations Regulations 2000. Bulbance should also be made to 'HSE ECG291: Cadmium and you'
 - any new timber treated with pentachlorophenol
 - non galvanneal mild steel structural fittings for building elements particularly susceptible to corrosion
 - concrete used in circumstances where it is susceptible to alkali-silica reaction
 - materials containing chlorofluorocarbons (CFC's)
 - solvent based paints except where water based paints are unsuitable for unavailable
 - any new materials not in accordance with statutory requirements, British Standards, Codes of Practice and good building practice current at the date of incorporation of the relevant materials into the Works or the specifications thereof

Note: Layout subject to input from structural engineer details of all easements, rights of way and wayleaves, statutory approvals and utility information

Planning Application	2015-05-28	CC
Issued to Client	2015-04-02	CC
Issued to DTPC	2015-03-13	CC
First Issue	2015-03-12	CC

REVISION	DATE	BY
Preliminary		
For Approval		
Tender		
Construction		

Hitchcock Wright and Partners		
PROJECT		
Bridge Inn, Childwall Valley Road, Belle Vale		
DRAWING TITLE		
Existing Site Sections		
SCALE	drawn by	date
1:200@A2	CC	Mar 2015
DRAWING NO	revision	
14-123-160	©	



T: 0151 207 4371 • F: 0151 207 7087