


legend

- SAVP SOIL & VENT PIPE
- SS STUB STACK PIPE
- OWP RAINWATER PIPE
- BIG BACK INLET GUTTER & RAINWATER PIPE
- EMERGENCY LIGHTING
- HEAT DETECTOR TO BS 5445 :PART 5
- SMOKE DETECTOR TO BS 5445 :PART 7
- PASSIVE NFPA RED DETECTOR
- TELEPHONE JACK POINT
- IS. ISOLATION SWITCH
- DOUBLE SOCKET T.V. AERIAL POINT
- Ceiling mounted spotlights
- PENDANT LIGHT
- LIGHT SWITCH
- THERMAL INTERFACE UNIT
- MECHANICAL EXTRACT
- EXTRACT DUCT
- VENT GRILLE
- WALL ISOLATOR
- ALARM P ALARM PANEL
- ALARM P FIRE ALARM PANEL
- FIRE ALARM SOUNDER
- FIRE BREAK GLASS POINT

- FD30S Indicates Fire Door / Frame 30min with Intumescent Filled with Self-Closing device
- FD60S Indicates Fire Door / Frame 60min with Intumescent Filled with Self-Closing device
- VP Indicates steel work, refer to structural drawings for details and specification
- AOV Automatic Opening Vent, connected to the alarm.
- Internal drainage.

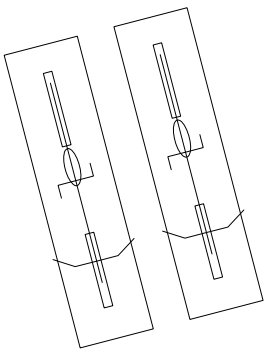

12 no. galvneated steel with cross cycle stud, 600x160, L2000 VOLET BLUE 550mm long and 100mm wide, to BS 5445-1, all to be installed in accordance with manufacturers written instructions, all to be agree with local authority.

Dashed lines indicates existing doors / frames and non loading walls. Safetyware and finishes WC for grabbing up seating strategies and stop off existing water supply. Allow for making good to all disturbed check that walls are non loading bearing and confirm with structural engineer. Refer to structural engineers drawings for further details.

UPGRADE EXISTING PARTITION TO 1 HOUR FIRE RATING DOUBLE GLAZING TO 1 HOUR FIRE RATING DOUBLE GLAZING INSULATION, PAIR AND FLAT JOINTS, FINISHES TO CLIENT CHOICE.

Wall type G, refer to drawing no. 200 for further details

Break two and form new opening, allow for install bsmo, support as required. Allow for installing new other retail and approved, all to be installed in accordance with Manufacturers written instructions, all to be installed in accordance with local authority. 150mm and bearing both sides, allow for making good to joints with salvage brickwork. On the wall, the wall is to be made good with Intumescent strips as required. Interface between mastic and backing out. Door type and finish to be confirmed by client. Allow for making good to all to all disturbed surfaces to match existing.

Allow for making good existing door and frame and back of door opening with timber and to suit depth of existing wall and two types of 150mm wall work.

Allow for making good existing partition opening to receive new door and frame 500mm wide and 2100mm high, allow for making good to all disturbed surfaces as necessary.

Folding Bay Platform relief lift

Proposed ground floor plan @ 1:50

