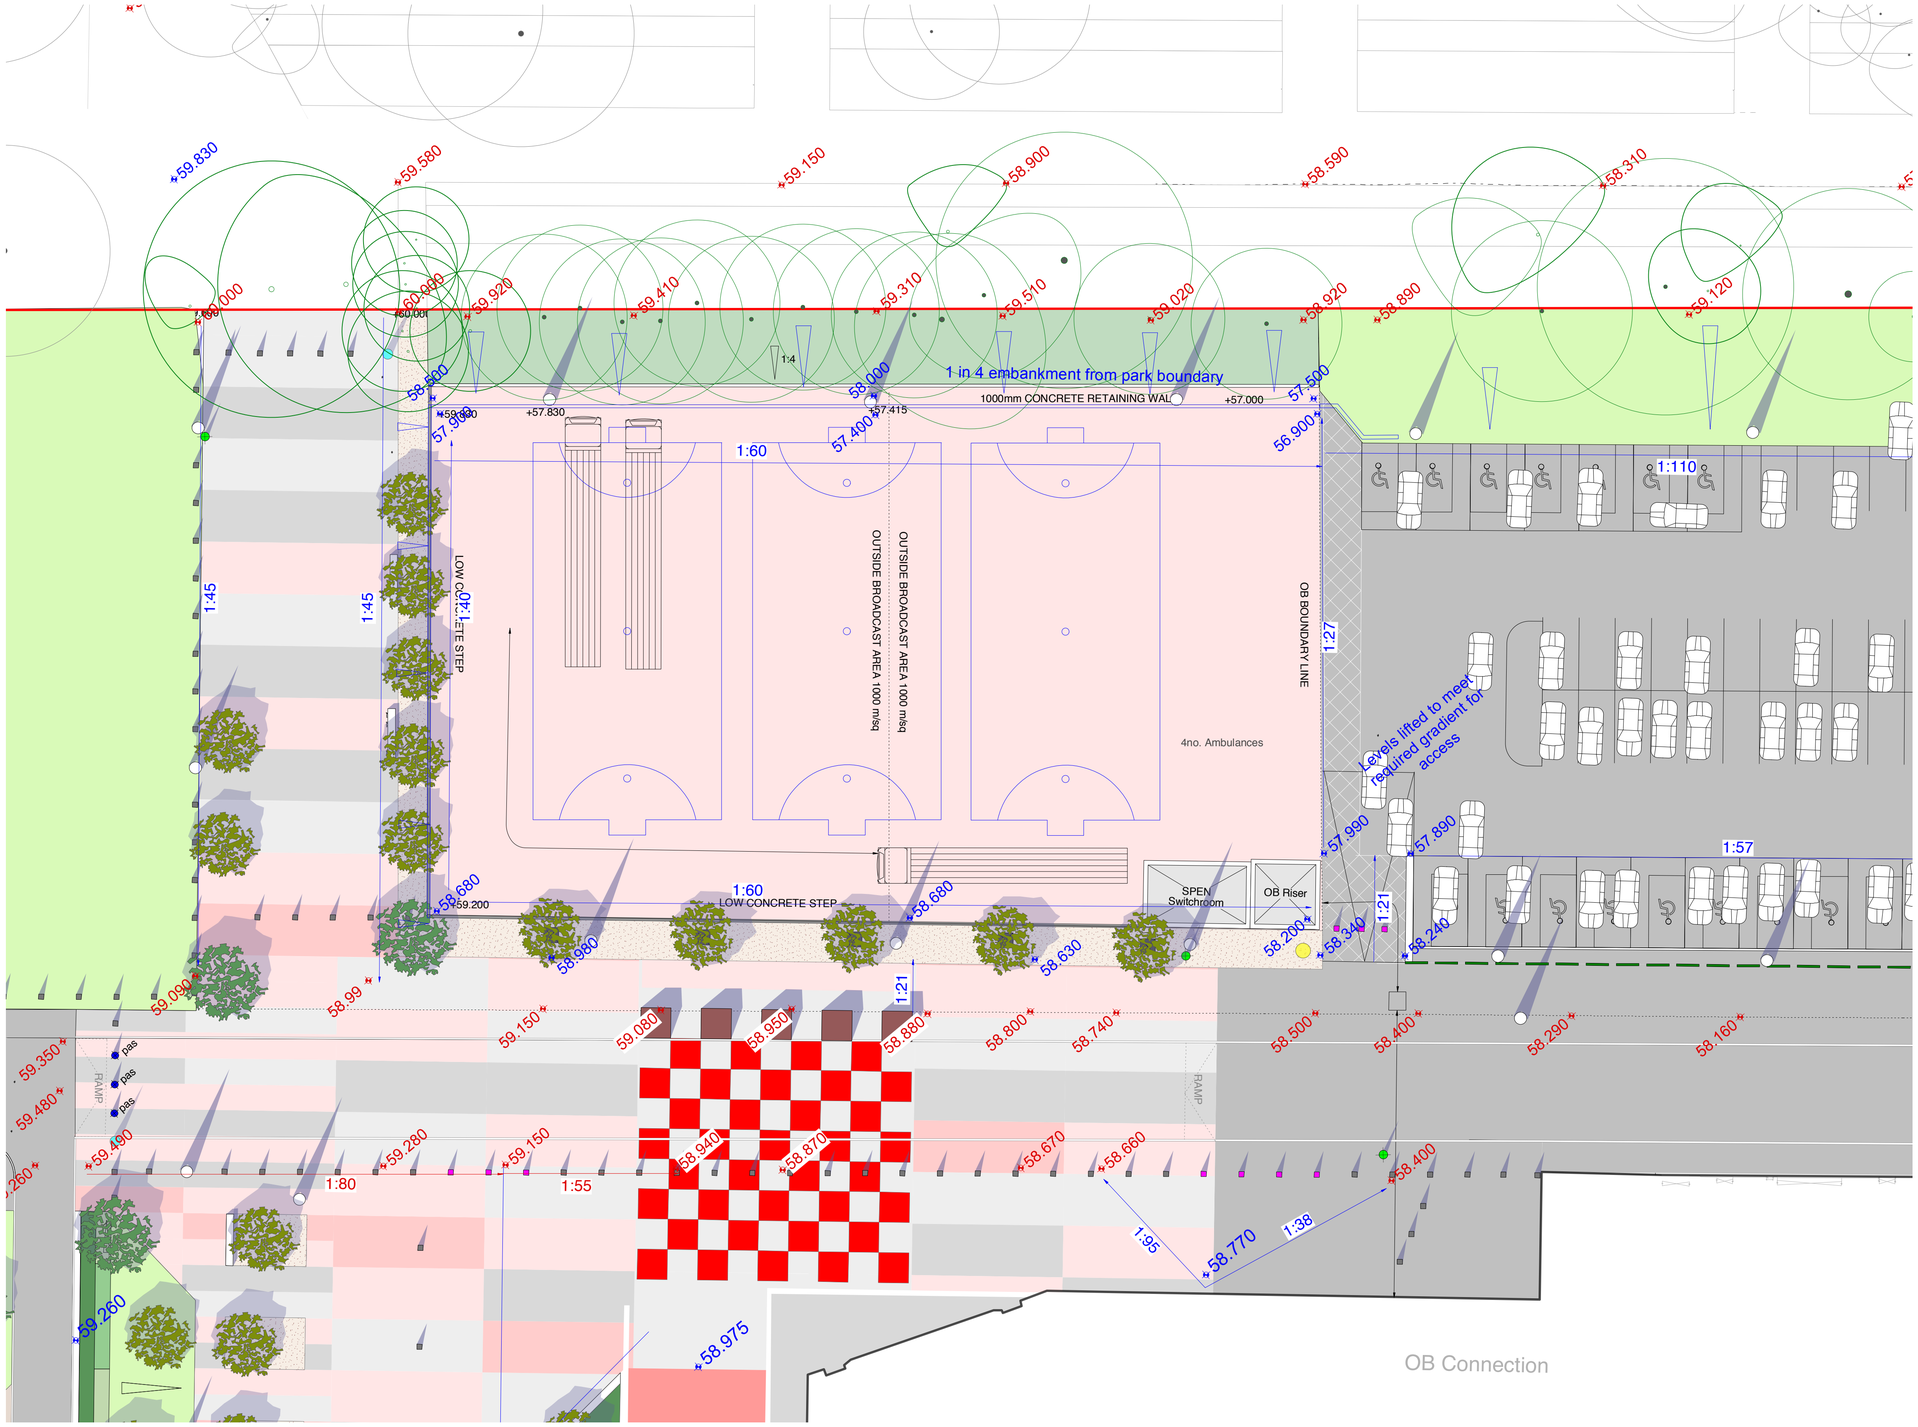

MATERIALS KEY

HARDWORKS

EXPOSED AGGREGATE CONCRETE
-Stadium Concourse: Scarf
Type: Artevia by LaFarge Ltd
Colour: Red (Bespoke) to complement main stand brick

EXPOSED AGGREGATE CONCRETE
-Stadium Concourse: Scarf
Type: Artevia by LaFarge Ltd
Colour: Grey (Bespoke)

EXPOSED AGGREGATE CONCRETE
Type: Artevia by LaFarge Ltd
Colour: Mixed range of approximately 4 colours (Bespoke)

EXPOSED AGGREGATE CONCRETE
-Chequerboard area
Type: Artevia by LaFarge Ltd
Colour: Red (Bespoke)

CONCRETE ASPHALT - To OB Area
- Type: Hardicrete - finish to be agreed
- Supplier: Miles Macadam Ltd or similar approved
- Colour: Single colour to match concourse

POROUS RESIN BOUND AGGREGATE
- To 'Grove' strips
- Open Textured Surface to Porous finish
- Colour: Red/White/Grey mix, 'Rougeite'
- Supplier: LaFarge Ltd or similar approved

EXISTING MACADAM HIGHWAY.
Re-surfaced as required

CONCRETE RETAINING WALL
- Low retaining wall to edge of OB area.
- Smooth fine finish
- Approx 1000mm

ANTI SLIP THERMOPLASTIC SPORT MARKINGS
- Markings for 3no. 5-a-side football pitches or 1no. large pitch. Final layout subject to further consultation.
- Colours: To be agreed, subject to final layout

FURNITURE

POWER + WATER OUTLET
- Pop Up power points
- Recessed into ground when no in use.
- Supplier and final locations to be agreed

COLUMN MOUNTED PUBLIC REALM LIGHTING
- Please refer to detail lighting layout drawing

CCTV Unit
Where possible affixed to Lighting columns
Units positioned in approximately 100m intervals.
- Supplier and final locations to be agreed

SIGNAGE POST - COLUMN MOUNTED SIGNAGE
- Final specification subject to site wide signage strategy
- Locations are indicative only
- Supplier to be agreed

TREE CONTAINER
- 1.5x1.5m
- Galvanised steel planter with water gators
- Deepdale Trees Ltd or similar approved

SEATS
Concrete approx 500mm deep x 2500mm long
- Finishes and detailing subject to further design.
- Possibility of incorporating feature strip lighting
- To include timber top, backrests and armrests as required.

FEATURE TOTEMS
- To arrival space off Walton Breck Road and near 'OB'
- Varying heights. 2x2m x upto to 1m high
- Possibility to include feature artwork
- Material: Granite. Colour to be agreed

PAS RETRACTABLE BOLLARDS
- Stainless steel
- PAS rated, Counter terrorism bollards
- Final specification and rating to be agreed

FIXED BOLLARD
- Stainless steel, anti ram bollards
- To match retractable bollards

RETRACTABLE BOLLARD
- Stainless steel, anti ram bollards
- Retracted bollard to include integral locaking mechanism and sit flush with surround surfacing when lowered

CYCLE STANDS
- Stainless steel
- Subject to further detailed design

OB Riser Building
- Internal DIM 4000x4000mm

SPEN Switchroom Building
- Internal DIM 6518x3827mm

EXISTING FURNITURE RELOCATED (LEGACY)

STEEL HOOP GUARDRAIL
- Existing hoops to be salvaged and repaired as required
- To be relocated along Anfield Road

SOFT WORKS

CLEAR STEM FEATURE TREES:
Semi Mature trees.
- Please refer to schedule for details
- Minimum 2.2m Clear stem

NATIVE & ORNAMENTAL PLANTING
- Seasonal interest throughout.
- A balance of ornamental and native species
- Visual impact.

LAWN
- Low maintenance, hardwearing turf

NOTES:
1. Do not scale from this drawing
2. All setting out, levels and dimensions to be agreed on site.
3. The dimensions of all materials must be checked on site before being laid out.
4. This drawing must be read with the relevant specification clauses and detail drawings
5. Order of construction and setting out to be agreed on site.
6. This drawing is copyright protected and may not be reproduced in whole or part without written authority.

Planit IE

2 Back Grafton St, Altrincham, Cheshire, WA14 1DY
+44 (0)161 928 9281

Studio 303, Black Bull Yard, 24-28 Hatton Wall, London, EC1N 8JH
+44 (0)20 7430 0754

Project	New Anfield
Client	Liverpool Football Club
Drg title	Detail Area 3 - OB
Drg nr	**PL1312.GA.114_PL01**

Planning

Scale	1:200 @ A1	Drawn	RM
Status	Planning	Checked	LH