


Renown

RENOWN DIAMOND DOOR WITH ANDAMAN BRASS GLASS



RENOWN DOOR WITH
ANDAMAN ZINC GLASS

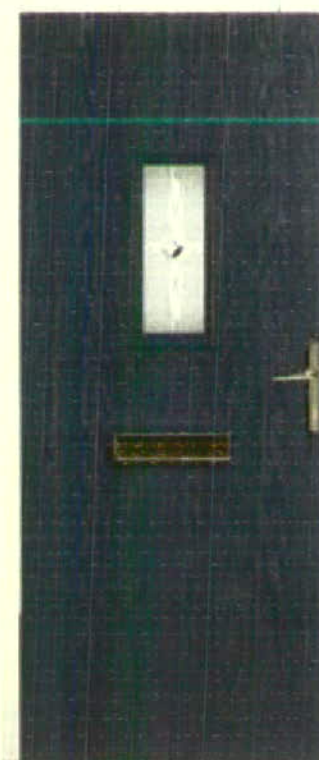

RENOWN DOOR WITH
MEDITERRANEAN GLASS

DOOR COLOUR OPTIONS



Black




Blue




Green




Red



White

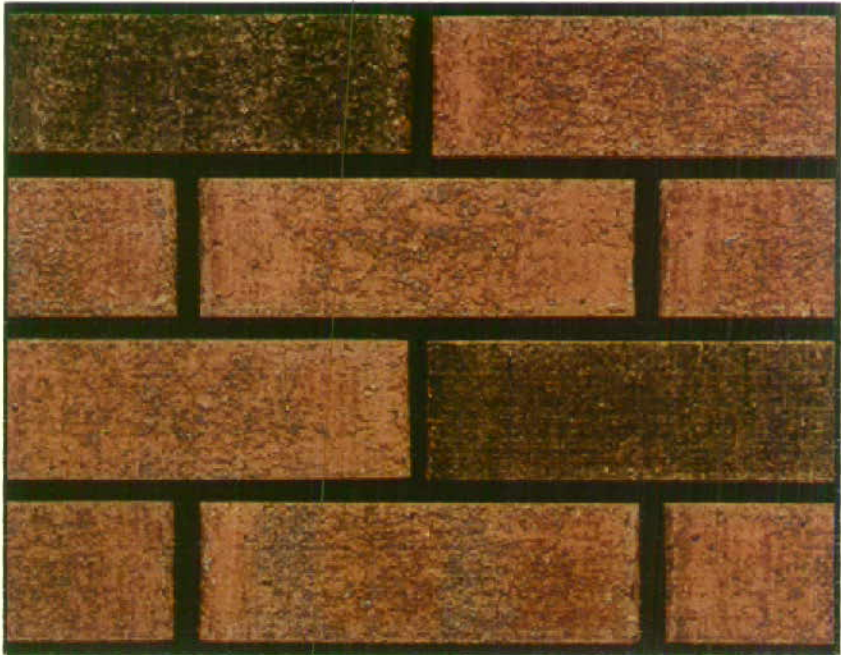

Product Information			
Ibstock Code:	2804		
Type:	Wirecut		
Facing Description:	Rolled		
Dry Brick Weight (kg):	2.3		
Pack Quantity:	500		
Packaging (standard):	banded (plastic) and shrinkwrapped		
Technical Specification (to BS EN 771-1)			
Brick Dimensions (L x W x H mm):	215x102x65		
Size Tolerances Mean & Range:	T2 R1		
Configuration:	Vertically Perforated		
Voids (%):	23-28		
Compressive Strength (N/mm²):	>= 60		
Active Soluble Salts:	S2		
Water Absorption (% weight):	<= 10		
Durability:	F2~		
Gross Dry Density (Sound Insulation) (Kg/m³):	1610		
Equivalent Thermal Conductivity "K" value 5% Exposed:	1.12		
Initial Rate of Absorption (Suction Rate) (Kg/m²/min):	0.90		
EAN:	5036335195567		

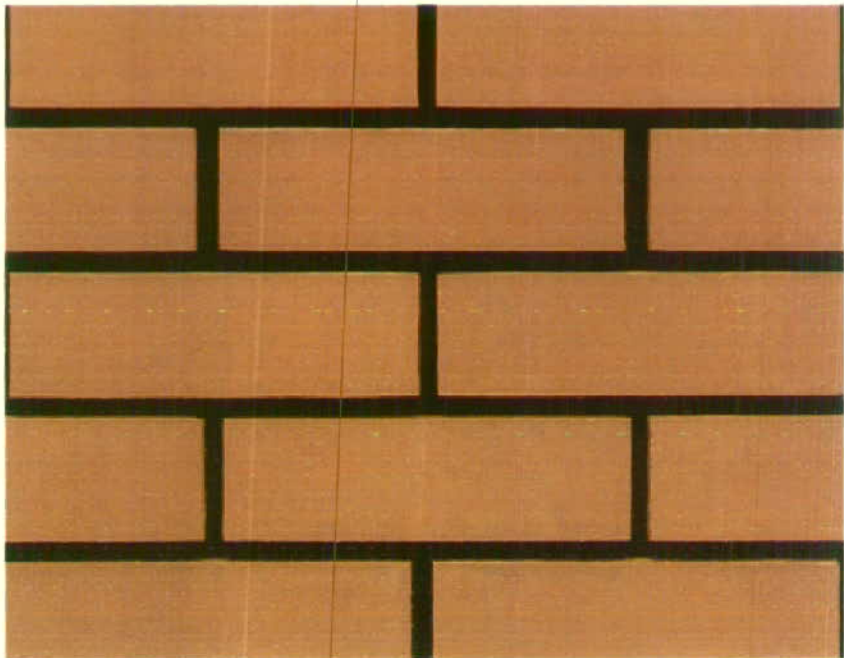

Product Information			
Ibstock Code:	3501		
Type:	Wirecut		
Facing Description:	Smooth		
Dry Brick Weight (kg):	2.3		
Pack Quantity:	424		
Packaging (standard):	banded (steel)		
Technical Specification (to BS EN 771-1)			
Brick Dimensions (L x W x H mm):	215x102x65		
Size Tolerances Mean & Range:	T2 R1		
Configuration:	Vertically Perforated		
Voids (%):	20-25		
Compressive Strength (N/mm²):	>= 60		
Active Soluble Salts:	S2		
Water Absorption (% weight):	<= 9		
Durability:	F2		
Gross Dry Density (Sound Insulation) (Kg/m³):	1570		
Equivalent Thermal Conductivity "K" value 5% Exposed:	1.13		
Initial Rate of Absorption (Suction Rate) (Kg/m²/min):	0.50		
EAN:	5036335020654		