ARBORICULTURAL STATEMENT

ON

PROPOSED DEVELOPMENT AT

GREENBANK SYNAGOGUE, GREENBANK DRIVE

LIVERPOOL L17 1AN

ON BEHALF OF

GREENDRIVE LIVERPOOL LIMITED
29 HOLLYWELL ROW, LONDON EC2A 4JB

Author: Glyn Thomas

Our Ref: CW/7988-AS

Date: 8 April 2016

CONTENTS

- 1. Executive Summary
- 2. Terms of Reference
- 3. Introduction
- 4. The Site
- 5. Statutory Tree Protection
- 6. Survey Methodology
- 7. Evaluation of the Trees
- 8. Conclusions
- 9. Recommendations
- 10. References

APPENDICES

- 1. Tree Survey Schedule CW/7988-SS2
- 2. Tree Constraints Plan CW/7988-P-TC
- 3. Guidance Note Retention Values and Visual Prominence
- 4. Guidance Note Statutory Controls
- 5. Glossary of Terms

8 April 2016 Page 2 of 13

EXECUTIVE SUMMARY

- 1.1 Restoration of an important listed building and conversion to apartments together with an enabling development of a new apartment block is proposed at Greenbank Synagogue in The Sefton Park Conservation Area in Liverpool.
- 1.2 Trees on and adjacent to the site have been assessed and the impacts of the development proposal on trees evaluated in accordance with current best practice.
- 1.3 Three visually important mature trees at the front of the site will be retained. A decaying poplar tree at the rear of the site and some of the low quality ornamental trees will be removed with only minor localised impacts on the character and appearance of the area that will be mitigated with new landscaping.
- 1.4 The retained trees will not be harmed and can be protected during the development in accordance with current best practice. Some construction works are proposed beneath the retained trees but are achievable using tried and tested mitigation methods. Residual arboricultural details can be resolved by planning condition.
- 1.5 Such pruning works as are necessary for construction access will not detract from the trees' health or visual qualities.
- 1.6 The spatial relationship of the retained trees with the development is sustainable with no significant post-development pressures likely to arise that could not be dealt with by routine management.
- 1.7 New trees and soft landscaping will enhance the setting of the development.

2. TERMS OF REFERENCE

2.1 Instruction

- 2.1.1 Cheshire Woodlands Limited is instructed by Greendrive Liverpool Limited to:
 - Survey and prepare a schedule of trees to comply with the general requirements of British Standard 5837:2012 Trees in relation to design, demolition and construction - Recommendations [BS5837]
 - Annotate a topographical land survey drawing and produce a Tree Constraints Plan
 - Appraise a development proposal in relation to trees and produce an arboricultural statement
- 2.1.2 The following documents have been considered in our evaluation:
 - Topographical land survey drawing ref. S16-055
 - Landscape layout drawing ref. M2423.02A
 - Preliminary tree survey schedule CW/7988-SS1
 - Tree survey plan drawing ref. CW/7988-P-SP-1

2.2 Limitations

- 2.2.1 This report and associated documents remain the copyright of Cheshire Woodlands Limited and there should be no transfer of rights to any third party without our express written consent.
- 2.2.2 Trees are assessed in sufficient detail to gather data for and inform the current project. Appraisal of tree stability is of a preliminary nature and sufficient to inform the project.

- 2.2.3 Trees are assessed from ground level without invasive investigation and from within the site or from areas with public access. Assessment may be restricted where site conditions prevent access, where trees are wholly or partially on neighbouring land or where ivy and other vegetation obscure crowns, stems and root collars. The disclosure of hidden defects cannot be expected.
- 2.2.4 Assessing the potential effects of trees on load-bearing soils beneath existing and proposed structures is not considered. No soil samples have been taken.

3. INTRODUCTION

- 3.1 The shaded sections in this report highlight the key issues that are specific to the project.
- 3.2 This assessment evaluates the effects of a development proposal on trees. The comparative values of trees are considered broadly in line with the guidance of BS5837 and their retention, protection and management are informed by this evaluation.
- 3.3 The development proposal comprises internal refurbishments and alterations to the Synagogue to form 22 apartments and an enabling development of a new block of 36 apartments with associated external landscaping works.
- 3.4 Glyn Thomas, senior consultant and Wayne Barnett, surveyor with Cheshire Woodlands Limited assessed the trees and the development proposal. The trees were surveyed on 21 December 2015.
- 3.5 This report provides sufficient information to demonstrate impacts on trees and enable the local planning authority [LPA] to determine a planning

8 April 2016 Page 5 of 13

application insofar as it relates to trees. It does not include detailed working specifications for the protection of trees or engineering and design features, which if required can be resolved by planning condition.

4. THE SITE

- 4.1 The site is a level, roughly rectangular-shaped plot of around 0.6 hectares to the east side of Greenbank Drive, some 4.5km south-east of Liverpool city centre. The site houses a synagogue, ancillary buildings, hardstanding and soft landscaping served by vehicular and pedestrian accesses off Greenbank Drive. The site is bounded by public highway to the west, residential properties to the south and east and sheltered housing to the north.
- 4.2 The British Geological Survey Geology of Britain Viewer identifies the site as lying close to an interface of 'Till, Devensian Clay, Sandy, Gravelly, Cobbly' and 'Shirdley Hill Sand Formation Sand'.

STATUTORY TREE PROTECTION

5.1 An email enquiry to Liverpool City Council confirmed that the site is in the Sefton Park Conservation Area and that trees on the site are not currently the subjects of a tree preservation order. See appendix 4 for further guidance.

6. SURVEY METHODOLOGY

- 6.1 The trees were identified, measured and recorded in the survey schedule at appendix 1. Stem diameters and canopy spreads were mostly measured using a tape, tree heights using a tape and clinometer.
- 6.2 The trees were assessed for mechanical stability on the basis of the 'visual tree assessment method' (Mattheck and Breloer 1994).
- 6.3 The trees were assessed for 'visual prominence' and were categorised as set out in Table 1 below (see appendix 3 for further guidance).
- 6.4 A brief assessment for obvious signs of wildlife habitat in trees and hedges on the site was carried out during the survey. No protected or exceptional habitats were identified and details were not recorded.
- 6.5 The topographical land survey overlaid with the site layout proposal drawing is the base for the tree constraints plan at appendix 2.
- 6.6 Below ground constraints are represented on the drawing as 'root protection areas' [RPA], calculated in accordance with section 4.6 and table D.1 of BS5837. Above-ground constraints for the three London plane trees at the front of the site are represented as 'shading segments' plotted in accordance with section 5.2.2 of BS5837.

8 April 2016 Page 7 of 13



7. EVALUATION OF THE TREES

7.1 BS5837 recommends that trees be evaluated and categorised as set out in Table 1, which also provides a summary of the impact of the application proposal on trees.

7.2 Table 1

	To be retained and protected	To be removed for development	To be removed for other reasons
Category A High quality with life expectancy of at least 40 years	Trees T1, T2 and T3	None	None
Category B Moderate quality with life expectancy of at least 20 years	None	None	None
Category C Low quality with life expectancy of at least 10 years, or small young trees	Groups G1, G2 and G6	Trees T4 and T5 and groups G3, G4 and G5	None
Category U Cannot be retained in context of current land-use for longer than 10 years	None	None	Tree T6
Hedges and Shrubs	Hedge H1 and shrubs S1	None	None

- 7.3 A total of six individual trees, six groups of trees, one hedge and an area of shrubs have been assessed. All of the surveyed trees, save for group G6, are within the site.
- 7.4 Three 'high quality' A category London plane trees at the front of the site (T1, T2 and T3) are visually important in the local street-scene and provide

Page 9 of 13

- a substantial contribution to the character and appearance of the area and the settings of both the conservation area and the listed synagogue.
- 7.5 All of the remaining trees are 'low quality' C category ornamental trees that contribute very little to the wider amenity, with an 'unsuitable' U category Lombardy poplar tree on the rear boundary.
- 7.6 Removal of the decaying U category poplar tree at the rear of the site is proposed as appropriate arboricultural management, irrespective of the development.
- 7.7 The 'low quality' C category trees T4, T5, G3, G4 and G5 will be removed to accommodate the development, with only a minor, localised impacts on the character and appearance of the area, the visual effects of which will be partially mitigated by retention of the important road frontage vegetation and further mitigated by the provision of new trees and landscaping.
- 7.8 The three visually important plane trees at the front of the site (T1, T2 and T3), together with their ornamental understorey (G1, G2, H1 and S1) and the off-site group G6 will be retained and can be protected during the development in accordance with current best practice as set out in BS5837.
- 7.9 Trees T1 to T3 will be pruned as detailed in the 'management' column of the tree survey schedule to remove minor low branches and improve ground clearances over the site, both vehicular accesses and the public highway. The proposed works are of a relatively minor nature, conform to current best practice as set out in BS3998: 2010 Tree work Recommendations [BS3998] and will not detract from the trees' health or visual qualities.
- 7.10 Detailed guidance for the installation of new permanent hard surfaces within RPAs is set out at section 7.4 of BS5837 and will be implemented in the areas identified by orange dash-hatching and blue cross-hatching on

the tree constraints plan where areas of new hard surfacing or re-surfacing of existing hardstanding are proposed beneath retained trees T1 to T3. The areas of new hard surfacing cover between 1 and 15% of the total RPAs and providing the necessary safeguards are implemented during the design and build phases, there should be no damage to the retained trees.

- 7.11 The proposed spatial relationship of the retained trees with the development is sustainable and there are no significant issues of post-development pressure likely to arise that could not be dealt with by routine management.
- 7.12 A detailed landscaping scheme is submitted with the planning application and proposes the establishment of new trees, shrubs and hedges around the buildings and the site boundaries. The new soft landscaping will mitigate trees lost to the development, enhance the setting of the site and provide long-term amenity benefits.
- 7.13 Residual details for the protection of retained trees during the development and construction works within RPAs can be resolved by planning condition.

8. CONCLUSIONS

- 8.1 A decaying poplar tree at the rear of the site will be removed as appropriate arboricultural management, irrespective of the development.
- 8.2 Implementing the development will require the removal of 'low quality' C category mainly ornamental trees, the loss of which will have only minor localised impacts on the character and appearance of the area that can be mitigated by the provision of new trees and landscaping.
- 8.3 The visually important mature road frontage vegetation, including the three



- 'high quality' A category London plane trees will be retained and can be protected during the development in accordance with current best practice.
- 8.4 Some construction works are proposed within RPAs but are achievable without significant conflicts using tried and tested mitigation methods.
- 8.5 Such pruning works as are necessary to provide construction access onto the site are of a relatively minor nature, conform to current best practice and will not detract from the trees' health or visual qualities.
- 8.6 The proposed spatial relationship with the retained trees is sustainable and no significant issues of post-development pressure are likely to emerge that could not be managed with routine maintenance.
- 8.7 New tree, shrub and hedge planting will mitigate trees lost to the development and provide long-term amenity benefits.
- 8.8 Residual details for the protection of retained trees during the development and the installation of new hard surfacing within RPAs can be resolved by planning condition.
- 8.9 I have taken account of the information given to me and my own observations on site and conclude that the scheme is arboriculturally sound and that the long-term well-being of the retained trees can be safeguarded in a sustainable manner.

9. RECOMMENDATIONS

9.1 No tree pruning or removal works should commence on site until the requisite consents have been obtained from the local planning authority [LPA], either in respect of the conservation area legislation or as part of a

detailed planning permission.

- 9.2 All tree pruning and removal works should be implemented in accordance with the tree survey schedule at appendix 1 and in compliance with BS3998.
- 9.3 Statutory protection of wildlife should be taken into account in the planning and execution of tree pruning and removal. See appendix 4 for further guidance.
- 9.4 All trees, shrubs and hedges proposed for retention should be protected during the development in accordance with a tree protection plan and arboricultural method statement to be agreed with the LPA and in compliance with BS5837.
- 9.5 No vehicles, plant or machinery higher than 4 metres shall access the site via the existing vehicular accesses off Greenbank Drive.
- 9.6 Areas of new hard surfacing identified by orange dash-hatching and blue cross-hatching on the tree constraints plan at appendix 2 should be installed to engineer-designed construction specifications and method statements to be agreed with the LPA and in compliance with BS5837.
- 9.7 Foundation design should take into consideration the juxtaposition of existing and proposed trees and the nature of the load-bearing soils.
- 9.8 Underground services should be installed in accordance with a scheme of works to be agreed with the LPA and in compliance with the requirements of National Joint Utilities Group Guidelines for the Planning, Installation and Maintenance of Utility Apparatus in Proximity to Trees Volume 4 [NJUG 4].

9.9 Landscaping should be implemented in accordance with the Barnes walker Landscape Layout drawing ref. M2423.02A.

10. REFERENCES.

Anon. Geology of Britain Viewer. British Geological Survey, Nottingham. http://www.bgs.ac.uk/ (accessed 7 April 2016)

BS5837:2012. Trees in relation to design, demolition and construction - Recommendations. British Standards Institute, London.

BS3998:2010. Tree work - Recommendations. British Standards Institute, London.

Mattheck. M, and Breloer. H,. 1994. The Body Language of Trees A handbook for failure analysis. Research for Amenity Trees No. 4.

NJUG Volume 4. 2007. NJUG Guidelines for the Planning, Installation and Maintenance of Utility Apparatus in Proximity to Trees. National Joint Utilities Group, Milbank, London. 34pp.

APPENDIX 1

TREE SURVEY SCHEDULE

cheshire woodlands arboricultural consultancy

PROJECT: GREENBANK SYNAGOGUE, GREENBANK DRIVE, LIVERPOOL SURVEYED BY: WAYNE BARNETT

DATE: 21 DECEMBER 2015 CLIENT: **NC HOMES ARCHITECTS** REF: CW/7988-SS2

PAGE: 1

REVISIONS:

No.	Species	Age Range	Height (m)	Crown Spread (m)		Vitality	Comments	Management	Visual	Retention Value Existing	Retention Value Proposed	BS5837 RPA Radius (m)
T1	London plane (Platanus x hispanica)	M	21	27	1070	N	 Part of a formal avenue along Greenbank Drive Recently severed/removed ivy to a height of 2m with dead/dying ivy in low and mid crowns Minor displacement of adjacent gate pillar Ground clearance over highway of 4-5m and could be raised to 5m by removal/shortening of low lateral branches of up to 100mm diameter Low ground clearance over site (and access) down to 2m and could be raised to 4m by removal/shortening of minor low lateral and sub lateral branches 	Retain and protect during development Prune on west side by removal or shortening of low lateral branches to obtain 5m ground clearance over highway Prune on east side by removal or shortening of low lateral and sub lateral branches to obtain 4m ground clearance over site and access	3	A	A	12.9
T2	London plane	М	21	28	1310	N	 Part of a formal avenue along Greenbank Drive Minor bark staining to lower stem associated with old small diameter branch pruning wounds Minor displacement of adjacent stone coping Ground clearance over highway of 4m and could be raised to 5m by the removal or shortening of minor low lateral branches of up to 80mm diameter Ground clearance over site down to 2m and could be raised to 4m by the removal or shortening of minor low lateral branches of up to 80mm diameter 	Retain and protect during development Prune on west side by removal or shortening of minor low lateral branches to obtain 5m ground clearance over highway Prune on east side by removal or shortening of minor low lateral branches to obtain 4m ground clearance over site	3	A	A	15.0

Data in this schedule are time limited and subject to limitations described elsewhere.

HEADINGS & ABBREVIATIONS

Age Range Y = young SM = semi-mature EM = early-mature M = mature PM = post-mature V = veteran

Stem diameter (measured in accordance with Figure C.1 of BS5837: 2012) (MS = multi-stemmed EST = estimated) Stem Dia

Maximum crown spread (EST = estimated) **Crown Spread**

Vitality A measure of physiological condition, N = normal range R = reduced from the normal range for the species and age, P = poor, MD = moribund,

D = dead

Visual (Visual Prominence) **Retention Category Existing Retention Category Proposed** BS5837 RPA Radius

Broad indication of prominence in the landscape (0 = none 1 = very low up to 5 = very high) (G = contributes to a wider group) Broadly in accordance with Table 1 of BS5837: 2012 (considers the merits of the tree or group in the context of the existing land-use) Broadly in accordance with Table 1 of BS5837: 2012 (considers the merits of the tree or group in the context of a development proposal) Calculated in accordance with Table D.1 of BS5837: 2012

TREE SURVEY SCHEDULE

cheshire woodlands arboricultural consultancy

PROJECT: GREENBANK SYNAGOGUE, GREENBANK DRIVE, LIVERPOOL

CLIENT: NC HOMES ARCHITECTS

REF: CW/7988-SS2

SURVEYED BY: WAYNE BARNETT

DATE: 21 DECEMBER 2015 PAGE: ²

Nic	Charles	٨٠٠	Hoiobt	Cnorrm	Ctom	Vitalita	Comments	Vonegement	Visual	Retention	Retention	BS5837
No.	Species	Age Range	Height (m)	Spread (m)	Dia. (mm)	vitality	Comments	Management	Visual	Value Existing	Value Proposed	RPA Radius (m)
ТЗ	London plane	M	20	25.5	1400	N	 Part of a formal avenue along Greenbank Drive Moderate displacement of adjacent gate pillar, stone coping, hard surfaces and edging kerbs Recently severed/removed ivy to a height of 2m Low ground clearance over highway down to 2m and could be raised to 5m by the removal/shortening of minor low lateral branches of up to 80mm diameter Low ground clearance over access drive to Shalom Court down to 2m and could be raised to 4m by the removal/shortening of minor low lateral branches of up to 50mm diameter Low ground clearance over site down to 1m and could be raised to 4m by the removal of a low lateral branch of around 250mm diameter and minor low lateral of up to 80mm diameter 	Retain and protect during development Prune on west side by removal or shortening of minor low lateral branches to obtain 5m ground clearance over highway Prune on east side by removal or shortening of low lateral and sublateral branches to obtain 4m ground clearance over site and access	3	A	A	15.0
T4	Ash (Fraxinus excelsior)	Y	7	4	100	N	Within a grassed area to the edge of an existing driveway Heavily suppressed	Remove for development Grind stump to a depth of 0.2m	1	С	U	N/A
Т5	Willow (Salix sp.)	SM	3.5	10	230	N	Within a grassed area to the edge of an existing driveway Weeping growth habit with crown extending to ground level	Remove for development Grind stump to a depth of 0.2m	2	С	U	N/A
Т6	Lombardy poplar (Populus nigra 'Italica')	M	25	14	1000 (EST)	N	 Growing alongside a 3m high brick boundary wall Stem and crown biased to east Tapping with a nylon hammer revealed audible signs of significant decay/hollowing to lower stem up to 2m Dense vegetation and ivy prevented a more detailed assessment of the lower stem 	Fell and grind stump to a depth of 0.3m	3	U	U	N/A
G1	Cherry (Prunus sp.)	Y-SM	≤6	≤7 (EST)	≤240	N	 Regularly spaced group fronting the highway Redundant stakes and ties 	Retain and protect during development Remove redundant stakes and ties	2	С	С	≤3.0
G2	Cherry	Y-SM	≤5	≤7 (EST)	≤180	N	 Regularly spaced group fronting the highway Redundant stakes and ties 	Retain and protect during development Remove redundant stakes and ties	2	С	С	≤2.1

TREE SURVEY SCHEDULE

cheshire woodlands arboricultural consultancy

PROJECT: GREENBANK SYNAGOGUE, GREENBANK DRIVE, LIVERPOOL

CLIENT: NC HOMES ARCHITECTS


REF: CW/7988-SS2 SURVEYED BY: WAYNE BARNETT

DATE: 21 DECEMBER 2015 DAGE: 3

	. 011/1/00 00	_						!	AGE:	J		
No.	Species	Age Range	Height (m)	Crown Spread (m)		Vitality	Comments	Management	Visual	Retention Value Existing	Value	BS5837 RPA Radius (m)
G3	Willow Norway maple	SM SM	≤11 (EST)	≤10 (EST)	≤MS 4 X	N	Closely spaced group of boundary trees, the majority of which save for tree G3/2 are off-site	Fell for development Grub out or grind stumps to a	2	С	U	N/A

		runge	(111)	(m)	(mm)					Existing	Proposed	(m)
G3	Willow Norway maple (Acer Platanoides)	SM SM	≤11 (EST)	≤10 (EST)	≤MS 4 X 350 (EST)	N	 Closely spaced group of boundary trees, the majority of which save for tree G3/2 are off-site G3/1 Willow Multi-stemmed Stems abut a steel palisade fence and are causing significant localised displacement and damage Growing alongside an off-site electrical substation and regularly pruned to maintain clearances from the structure G3/2 Norway maple Stem abuts a steel palisade fence with potential for future direct damage G3/3 & G3/4 Norway maple Within adjacent car park 4m crown overhang to site and could be cut back to the boundary 	Fell for development Grub out or grind stumps to a depth of 0.3m	2	С	U	N/A
G4	Cherry Willow Sycamore (Acer pseudoplatanus) Elder (Sambucus nigra)	SM-EM SM SM	≤10 (EST)	≤10 (EST)	≤MS 280 180 150 (EST)	D-N	 Closely spaced group of ornamental boundary trees Dense vegetation prevents a detailed assessment Several trees are memorial plantings Contains several dead, failed and partially failed trees 	Fell for development Grub out or grind stumps to a depth of 0.3m	1	С	U	N/A
G5	Hawthorn (Crataegus monogyna) Cherry	Y SM	≤10	≤10 (EST)	≤320	N	Closely spaced linear group of ornamental boundary trees The hawthorns are probably remnants of a former hedge Low crown overhang to car park and driveway Several trees are memorial plantings Redundant stakes and ties	Fell for development Grub out or grind stumps to a depth of 0.3m	2	С	U	N/A
G6	2 Lombardy poplar	EM	20 (EST)	10 (EST)	≤600 (EST)	R-N	Located off-site within the grounds of a neighbouring property Recently topped at 6-8m with minor regrowth	Protect during development No work required	3	С	С	≤7.2 (EST)
H1	Privet (Ligustrum ovalifolium)	N/A	≤2	≤1	N/A	N	Clipped boundary hedge fronting the highway	Retain and protect during development Maintain by regular clipping	2	-	-	-
S1	Cherry laurel (Prunus laurocerasus)	N/A	1.8	2	N/A	N	Clipped ornamental boundary shrubs	Retain and protect during development Maintain by regular clipping	1	-	-	-

APPENDIX 2

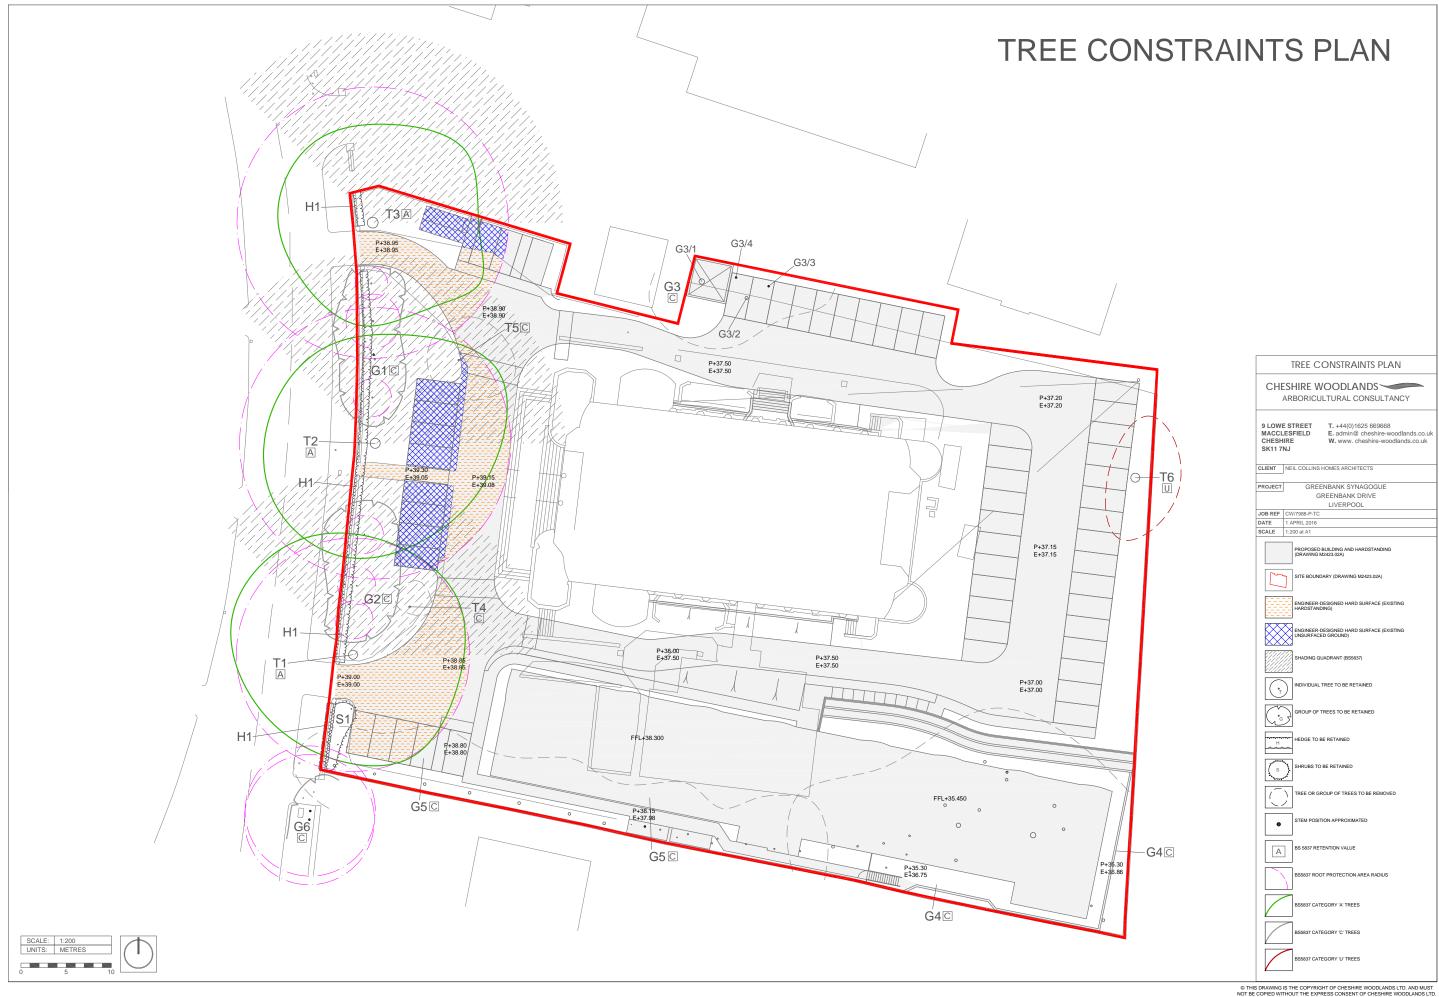

APPENDIX 3

Guidance Note - Assessment of Visual Prominence and Assessment of Retention Values

Visual Prominence Values

Determined by assessment of current and potential visual prominence and taking account of location, tree size, growth potential and useful life expectancy. Visual prominence values are classified as follows:

(0) none, (1) very low up to (5) very high

Retention Values

Trees or groups of trees are evaluated twice in order to facilitate consideration of their relative merits. Firstly, the trees are assessed and categorised in the context of the pre-development situation to provide a broad valuation of all of their attributes and the contribution to their environs. Secondly, the trees are similarly assessed and categorised in the context of a development proposal. The evaluations consider current or projected:

- life expectancy (broad categorisation)
- visual prominence (current and potential)
- landscape function
- numbers of other trees and their maturity (continuity for landscape, amenity, habitat)
- wildlife habitats (incl. continuity)
- safety
- conflicts with the built environment or other land-use
- cultural, historical or other special value

Groups of trees are assessed and categorised as a single unit.

Pre-Development Retention Value

Each surveyed tree or group of trees is valued and placed into one of the following categories (A, B, C or U). The valuation considers the benefits and disbenefits of retaining the tree or group of trees in the pre-development context; any specific issues are noted in the tree survey schedule.

(A) Trees the retention of which in the pre-development context is most desirable and that have an estimated remaining life expectancy of at least 40 years (high value category)

Wholly appropriate to the pre-development situation and without significant conflict

(B) Trees the retention of which in the pre-development context is desirable and that have an estimated remaining life expectancy of at least 20 years (moderate value category)

Appropriate to the pre-development situation but not of highest value

(C) Trees that could be retained in the pre-development context and have an estimated remaining life expectancy of at least 10 years (low value category)

Ill-suited to the pre-development situation but could be retained with moderate conflicts

Trees of no particular merit in the pre-development context

(U) Trees unsuitable for retention in the pre-development context

Cannot reasonably be retained within the pre-development situation for longer than 10 years

Post-Development Retention Value

With reference to a development proposal, each of the trees or groups of trees is placed in one of the following categories (A, B, C or U). The valuation considers the benefits and disbenefits of retaining the tree or group of trees in the context of the development proposal; any specific issues are noted in the tree survey schedule.

(A) Trees the retention of which is most desirable (high value category)

Retention wholly appropriate to the proposed situation and without significant conflict

(B) Trees the retention of which is desirable (moderate category)

Retention appropriate to the proposed situation but not of highest value and/or having only minor conflicts

(C) Trees which could be retained (low value category)

Retention ill-suited to the proposed situation but could be retained with moderate conflicts

Trees of no particular merit in the proposed situation

(U) Trees for removal

Cannot reasonably be retained within the proposed situation

APPENDIX 4

GUIDANCE NOTE- STATUTORY CONTROLS

TREES AND HEDGES:

Subject to certain specified exemptions, the Town and Country Planning Act 1990, requires that an application must be made to the local planning authority (LPA), to carry out works upon or remove trees that are subject to a tree preservation order (TPO).

Six weeks' notice must be given to the LPA of intention to carry out works upon or remove trees within a conservation area and not protected by a TPO.

Local planning authority consent may be required to carry out works upon or remove trees, shrubs and hedges that are the subjects of planning conditions.

LPA consent may be required for the removal of hedgerows under the Hedgerow Regulations 1997.

Your Council's planning department will advise whether or not any of the above controls apply to your trees, shrubs and hedges.

Subject to certain exemptions, the Forestry Act (1967 specified) requires that a licence must be obtained for the felling of growing trees

Your nearest Forestry Commission office will advise whether you require a felling licence.

WILDLIFE

The Wildlife and Countryside Act 1981 (together with the amendments of 1985 & 1991, the subsequent variations to the schedule orders, and strengthening amendments made within the Countryside and Rights of Way Act 2000) forms the basis for legislation protecting Britain's flora and fauna.

Nesting birds and all species of bat are afforded statutory protection. It is an offence to:

- disturb a nesting bird
- disturb a roosting bat or damage, destroy or block access to a bat roost
- intentionally kill, injure or take a bat
- sell, hire, barter or exchange a bat, dead or alive
- be in possession or control of a bat or anything derived from a bat

Your local Wildlife Trust or your Council's Ecologist will provide guidance on statutory controls relating to wildlife.

APPENDIX 5

GLOSSARY OF ARBORICULTURAL TERMS

Abscission. The shedding of a leaf or other short-lived part of a woody plant, involving the formation of a corky layer across its base; in some tree species twigs can be shed in this way

Abiotic. Pertaining to non-living agents; e.g. environmental factors

Absorptive roots. Non-woody, short-lived roots, generally having a diameter of less than one millimetre, the primary function of which is uptake of water and nutrients

Access facilitation pruning. One off tree pruning operation, the nature and effects of which are without significant adverse impact on tree physiology or amenity value, which is directly necessary to provide access for operations on site

Adaptive growth. In tree biomechanics, the process whereby the rate of wood formation in the cambial zone, as well as wood quality, responds to gravity and other forces acting on the cambium. This helps to maintain a uniform distribution of mechanical stress

Adaptive roots. The adaptive growth of existing roots; or the production of new roots in response to damage, decay or altered mechanical loading

Adventitious shoots. Shoots that develop other than from apical, axillary or dormant buds; see also 'epicormic'

Anchorage. The system whereby a tree is fixed within the soil, involving cohesion between roots and soil and the development of a branched system of roots which withstands wind and gravitational forces transmitted from the aerial parts of the tree

Arboricultural Method Statement. Methodology for the implementation of any aspect of development that is within the root protection area, or has the potential to result in loss of or damage to a tree to be retained

Arboriculturist. Person who has, through relevant education, training and experience, gained expertise in the field of trees in relation to construction

Architecture. In a tree, a term describing the pattern of branching of the crown or root system

Axil. The place where a bud is borne between a leaf and its parent shoot

Bacteria. Microscopic single-celled organisms, many species of which break down dead organic matter, and some of which cause diseases in other organisms

Bark. A term usually applied to all the tissues of a woody plant lying outside the vascular cambium, thus including the phloem, cortex and periderm; occasionally applied only to the periderm or the phellem

Basidiomycotina (Basidiomycetes). One of the major taxonomic groups of fungi; their spores are borne on microscopic peg-like structures (basidia), which in many types are in turn borne on or within conspicuous fruit bodies, such as brackets or toadstools. Most of the principal decay fungi in standing trees are basidiomycetes

Bolling. A term sometimes used to describe pollard heads

Bottle-butt. A broadening of the stem base and buttresses of a tree, in excess of normal and sometimes denoting a growth response to weakening in that region, especially due to decay involving selective delignification

Bracing. The use of rods or cables to restrain the movement between parts of a tree

Branch:

- · Primary. A first order branch arising from a stem
- Lateral. A second order branch, subordinate to a primary branch or stem and bearing sub-lateral branches
- Sub-lateral. A third order branch, subordinate to a lateral or primary branch, or stem and usually bearing only twigs

Branch bark ridge. The raised arc of bark tissues that forms within the acute angle between a branch and its parent stem

Branch collar. A visible swelling formed at the base of a branch whose diameter growth has been disproportionately slow compared to that of the parent stem; a term sometimes applied also to the pattern of growth of the cells of the parent stem around the branch base

Brown-rot. A type of wood decay in which cellulose is degraded, while lignin is only modified

Buckling. An irreversible deformation of a structure subjected to a bending load

Buttress zone. The region at the base of a tree where the major lateral roots join the stem, with buttress-like formations on the upper side of the junctions

Cambium. Layer of dividing cells producing xylem (woody) tissue internally and phloem (bark) tissue externally

Canker. A persistent lesion formed by the death of bark and cambium due to colonisation by fungi or bacteria

Canopy species. Tree species that mature to form a closed woodland canopy

Cleaning out. The removal of dead, crossing, weak, and damaged branches, where this will not damage or spoil the overall appearance of the tree

Compartmentalisation. The confinement of disease, decay or other dysfunction within an anatomically discrete region of plant tissue, due to passive and/or active defences operating at the boundaries of the affected region

Competent person. A person who has training and experience relevant to the matter being addressed and an understanding of the requirements of the particular task being approached.

Compression fork. An acute angled fork that is mechanically optimised for the growth pressure that two or more adjacent stems exert on each other

Compression strength. The ability of a material or structure to resist failure when subjected to compressive loading; measurable in trees with special drilling devices

Compressive loading. Mechanical loading which exerts a positive pressure; the opposite to tensile loading

Condition. An indication of the physiological condition of the tree. Where the term 'condition' is used in a report, it should not be taken as an indication of the stability of the tree

Construction. Site based operations with the potential to affect existing trees $% \left(1\right) =\left(1\right) \left(1\right) \left$

Construction exclusion zone. Area based on the Root Protection Area from which access is prohibited for the duration of the project

Crown/Canopy. The main foliage bearing section of the tree

Crown lifting. The removal of limbs and small branches to a specified height above ground level

Crown thinning. The removal of a proportion of secondary branch growth throughout the crown to produce an even density of foliage around a well-balanced branch structure

Crown reduction/shaping. A specified reduction in crown size whilst preserving, as far as possible, the natural tree shape

Crown reduction/thinning. Reduction of the canopy volume by thinning to remove dominant branches whilst preserving, as far as possible the natural tree shape $\frac{1}{2} \frac{1}{2} \frac{1}{2$

Deadwood. Dead branch wood

Decurrent. In trees, a system of branching in which the crown is borne on a number of major widely-spreading limbs of similar size (cf. excurrent). In fungi with toadstools as fruit bodies, the description of gills which run some distance down the stem, rather than terminating abruptly

Defect. In relation to tree hazards, any feature of a tree which detracts from the uniform distribution of mechanical stress, or which makes the tree mechanically unsuited to its environment

Delamination. The separation of wood layers along their length, visible as longitudinal splitting $\,$

Dieback. The death of parts of a woody plant, starting at shoot-tips or root-tips ${\bf r}$

Disease. A malfunction in or destruction of tissues within a living organism, usually excluding mechanical damage; in trees, usually caused by pathogenic micro-organisms

Distal. In the direction away from the main body of a tree or subject organism (cf. proximal)

Dominance. In trees, the tendency for a leading shoot to grow faster or more vigorously than the lateral shoots; also the tendency of a tree to maintain a taller crown than its neighbours

Dormant bud. An axial bud which does not develop into a shoot until after the formation of two or more annual wood increments; many such buds persist through the life of a tree and develop only if stimulated to do so

Dysfunction. In woody tissues, the loss of physiological function, especially water conduction, in sapwood

DBH (Diameter at Breast Height). Stem diameter measured at a height of 1.5 metres (UK) or the nearest measurable point. Where measurement at a height of 1.5 metres is not possible, another height may be specified

Deadwood. Branch or stem wood bearing no live tissues. Retention of deadwood provides valuable habitat for a wide range of species and seldom represents a threat to the health of the tree. Removal of deadwood can result in the ingress of decay to otherwise sound tissues and climbing operations to access deadwood can cause significant damage to a tree. Removal of deadwood is generally recommended only where it represents an unacceptable level of hazard

Endophytes. Micro-organisms that live inside plant tissues without causing overt disease, but in some cases capable of causing disease if the tissues become physiologically stressed, for example by lack of moisture

Engineer-designed hard surfacing. Hard surfacing constructed within the 'Root protection area' of a tree, which will be designed by a structural or geotechnical; engineer in collaboration with an arboriculturist as set out in clause 7.4 of British Standard BS5837:2012. The purpose being to minimise the effects of the construction on the health of the tree.

Epicormic shoot. A shoot having developed from a dormant or adventitious bud and not having developed from a first year shoot

Excrescence. Any abnormal outgrowth on the surface of tree or other organism $% \left\{ \mathbf{r}_{i}^{\mathbf{r}_{i}}\right\} =\mathbf{r}_{i}^{\mathbf{r}_{i}}$

Excurrent. In trees, a system of branching in which there is a well-defined central main stem, bearing branches which are limited in their length, diameter and secondary branching (cf. decurrent)

Fastigiate. Having upright, often clustered branches

Felling licence. In the UK, a permit to fell trees in excess of a stipulated number of stems or volume of timber

 $Field\ layer.\ Herbs,\ ferns,\ grasses\ and\ sedges$

Flush-cut. A pruning cut which removes part of the branch bark ridge and or branch-collar

Girdling root. A root which circles and constricts the stem or roots possibly causing death of phloem and/or cambial tissue

Ground layer. Mosses, ivy, lichens and fungi

Guying. A form of artificial support with cables for trees with a temporarily inadequate anchorage

Habit. The overall growth characteristics, shape of the tree and branch structure $% \left(1\right) =\left(1\right) \left(1\right)$

Haloing. Removing or pruning trees from around the crown of another (usually mature or post-mature) tree to prevent it becoming supressed

Hazard beam. An upwardly curved part of a tree in which strong internal stresses may occur without being reduced by adaptive growth; prone to longitudinal splitting

Heartwood/false-heartwood. The dead central wood that has become dysfunctional as part of the aging processes and being distinct from the sapwood

Heave. A term mainly applicable to a shrinkable clay soil which expands due to re-wetting after the felling of a tree which was previously extracting moisture from the deeper layers; also the lifting of pavements and other structures by root diameter expansion; also the lifting of one side of a wind-rocked root-plate

High canopy tree species. Tree species having potential to contribute to the closed canopy of a mature woodland or forest

Incipient failure. In wood tissues, a mechanical failure which results only in deformation or cracking, and not in the fall or detachment of the affected part

Included bark (ingrown bark). Bark of adjacent parts of a tree (usually forks, acutely joined branches or basal flutes) which is in face-to-face contact

Increment borer. A hollow auger, which can be used for the extraction of wood cores for counting or measuring wood increments or for inspecting the condition of the wood

Infection. The establishment of a parasitic micro-organism in the tissues of a tree or other organism $\,$

Internode. The part of a stem between two nodes; not to be confused with a length of stem which bear nodes but no branches

Lever arm. A mechanical term denoting the length of the lever represented by a structure that is free to move at one end, such as a tree or an individual branch

Lignin. The hard, cement-like constituent of wood cells; deposition of lignin within the matrix of cellulose microfibrils in the cell wall is termed Lignification

Lions tailing. A term applied to a branch of a tree that has few if any side-branches except at its end, and is thus liable to snap due to end-loading

Loading. A mechanical term describing the force acting on a structure from a particular source; e.g. the weight of the structure itself or wind pressure

Longitudinal. Along the length (of a stem, root or branch)

Lopping. A term often used to describe the removal of large branches from a tree, but also used to describe other forms of cutting

Mature Heights (approximate):

- Low maturing less than 8 metres high
- Moderately high maturing 8 12 metres high
- · High maturing greater than 12 metres high

Microdrill. An electronic rotating steel probe, which when inserted into woody tissue provides a measure of tissue density

Minor deadwood. Deadwood of a diameter less than $25\,\mathrm{mm}$ and or unlikely to cause significant harm or damage upon impact with a target beneath the tree

Mulch. Material laid down over the rooting area of a tree or other plant to help conserve moisture; a mulch may consist of organic matter or a sheet of plastic or other artificial material

Mycelium. The body of a fungus, consisting of branched filaments (hyphae)

Occluding tissues. A general term for the roll of wood, cambium and bark that forms around a wound on a woody plant (cf. woundwood)

Occlusion. The process whereby a wound is progressively closed by the formation of new wood and bark around it $\,$

Pathogen. A micro-organism which causes disease in another organism $\,$

Photosynthesis. The process whereby plants use light energy to split hydrogen from water molecules, and combine it with carbon dioxide to form the molecular building blocks for synthesizing carbohydrates and other biochemical products

Phytotoxic. Toxic to plants

Pollarding. The removal of the tree canopy, back to the stem or primary branches, usually to a point just outside that of the previous cutting. Pollarding may involve the removal of the entire canopy in one operation, or may be phased over several years. The period of safe retention of trees having been pollarded varies with species and individuals. It is usually necessary to re-pollard on a regular basis, annually in the case of some species

Primary branch. A major branch, generally having a basal diameter greater than $0.25\ x$ stem diameter

Primary root zone. The soil volume most likely to contain roots that are critical to the health and stability of the tree and normally defined by reference BS5837 (2012) Trees in Relation to design, demolition and construction

Priority. Works may be prioritised, 1. = high, 5. = low

Probability. A statistical measure of the likelihood that a particular event might occur

Proximal. In the direction towards from the main body of a tree or other living organism (cf. distal) $\,$

Pruning. The removal or cutting back of twigs or branches, sometimes applied to twigs or small branches only, but often used to describe most activities involving the cutting of trees or shrubs

Radial. In the plane or direction of the radius of a circular object such as a tree stem

Rams-horn. In connection with wounds on trees, a roll of occluding tissues which has a spiral structure as seen in cross-section

Rays. Strips of radially elongated parenchyma cells within wood and bark. The functions of rays include food storage, radial translocation and contributing to the strength of wood

Reactive Growth/Reaction Wood. Production of woody tissue in response to altered mechanical loading; often in response to internal defect or decay and associated strength loss (cf. adaptive growth)

Removal of deadwood. Unless otherwise specified, this refers to the removal of all accessible dead, dying and diseased branchwood and broken snags

Removal of major deadwood. The removal of, dead, dying and diseased branchwood above a specified size

Respacing. Selective removal of trees from a group or woodland to provide space and resources for the development of retained trees

Residual wall. The wall of non-decayed wood remaining following decay of internal stem, branch or root tissues

Rib. A ridge of wood that has usually developed because of locally increased mechanical loading. Often associated with internal cracking in the wood of the stem, branch or root.

Ring-barking (girdling). The removal of a ring of bark and phloem around the circumference of a stem or branch, normally resulting in an inability to transport photosynthetic assimilates below the area of damage. Almost inevitably results in the eventual death of the affected stem or branch above the damage

Ripewood. The older central wood of those tree species in which sapwood gradually ages without being converted to heartwood

Root-collar. The transitional area between the stem/s and roots

Root-collar examination. Excavation of surfacing and soils around the root-collar to assess the structural integrity of roots and/or stem

Root protection area (RPA). Layout design tool indicating a national minimum area around a tree deemed to contain sufficient roots and rooting volume to maintain the tree's viability and where the protection of the roots and soil structure is treated as a priority

Root zone. Area of soils containing absorptive roots of the tree/s described. The Primary root zone is that which we consider of primary importance to the physiological well-being of the tree

Sapwood. Living xylem tissues

Secondary branch. A branch, generally having a basal diameter of less than $0.25\ x$ stem diameter

Selective delignification. A kind of wood decay (white-rot) in which lignin is degraded faster than cellulose

Service. Any above- or below-ground structure or apparatus required for utility provision e.g. drainage, gas supplies, ground source heat pumps, CCTV and satellite communications

Shedding. In woody plants, the normal abscission, rotting off or sloughing of leaves, floral parts, twigs, fine roots and bark scales

Silviculture. The practice of controlling the establishment, growth, composition, health, and quality of forests to meet diverse needs and values

Silvicultural thinning. Removal of selected trees to favour the development of retained specimens to achieve a management objective

Single-up. Removal of stems from a multi-stemmed tree with the aim of developing a tree with a single stem.

Simultaneous white-rot. A kind of wood decay in which lignin and cellulose are degraded at about the same rate $\,$

Snag. In woody plants, a portion of a cut or broken stem, branch or root which extends beyond any growing-point or dormant bud; a snag usually tends to die back to the nearest growing point

Soft-rot. A kind of wood decay in which a fungus degrades cellulose within the cell walls, without any general degradation of the wall as a whole

Spores. Propagules of fungi and many other life-forms; most spores are microscopic and dispersed in air or water

Shrub species. Woody perennial species forming the lowest level of woody plants in a woodland and not normally considered to be trees

Sporophore. The spore bearing structure of fungi

Sprouts. Adventitious shoot growth erupting from beneath the bark

Stem/s. Principle above-ground structural component(s) of a tree that supports its branches

Stress. In plant physiology, a condition under which one or more physiological functions are not operating within their optimum range, for example due to lack of water, inadequate nutrition or extremes of temperature

Stress. In mechanics, the application of a force to an object

Stringy white-rot. The kind of wood decay produced by selective delignification $% \left(1\right) =\left(1\right) \left(1\right) \left$

Storm. A layer of tissue which supports the fruit bodies of some types of fungi, mainly ascomycetes

Structural roots. Roots, generally having a diameter greater than ten millimetres, and contributing significantly to the structural support and stability of the tree

Structure. Manufactured object, such as a building, carriageway, path, wall, service run, and built or excavated earthwork

Subsidence. In relation to soil or structures resting in or on soil, a sinking due to shrinkage when certain types of clay soil dry out, sometimes due to extraction of moisture by tree roots

Subsidence. In relation to branches of trees, a term that can be used to describe a progressive downward bending due to increasing weight

Taper. In stems and branches, the degree of change in girth along a given length

Target canker. A kind of perennial canker, containing concentric rings of dead occluding tissues

Targets. In tree risk assessment (with slight misuse of normal meaning) persons or property or other things of value which might be harmed by mechanical failure of the tree or by objects falling from it

Topping. In arboriculture, the removal of the crown of a tree, or of a major proportion of it

Torsional stress. Mechanical stress applied by a twisting force

Translocation. In plant physiology, the movement of water and dissolved materials through the body of the plant

Transpiration. The evaporation of moisture from the surface of a plant, especially via the stomata of leaves; it exerts a suction which draws water up from the roots and through the intervening xylem cells

Tree Protection Plan. Scale drawing, informed by descriptive text where necessary, based upon the finalised proposals, showing trees for retention and illustrating the tree and landscape protection measures

Tree Risk Assessment. An assessment and description of the risks and where appropriate the values associated with a tree or trees. The primary risk being considered is that from falling trees. Other risks, such as damage to infrastructure, interruption of service and building subsidence may also be considered

- Walkover A general view of the tree population considered in the context of the adjacent land-use to identify trees that present significantly elevated risks
- Drive-by A general view of the tree population from a moving vehicle and considered in the context of the adjacent land-use to identify trees that present significantly elevated
- Individual the assessment of risks from a single tree considered in the context of the adjacent land-use to identify trees that present significantly elevated risks

Understorey. This layer consists of younger individuals of the dominant trees, together with smaller trees and shrubs which are adapted to grow under lower light conditions

Understorey tree species. Tree species not having potential to attain a size at which they can contribute to the closed high canopy of a woodland

Vascular wilt. A type of plant disease in which water-conducting cells become dysfunctional

Vessels. Water-conducting cells in plants, usually wide and long for hydraulic efficiency; generally not present in coniferous trees

Veteran tree. Tree that, by recognised criteria, shows features of biological, cultural or aesthetic value that are characteristic of, but not exclusive to, individuals surviving beyond the typical age range for the species concerned. These characteristics might typically include a large girth, signs of crown retrenchment and hollowing of the stem

Vigour. The expression of carbohydrate expenditure to growth (in trees)

Vitality. A measure of physiological condition. N = within normal range for species and age, R = reduced from the normal range for the species and age, P = poor

 $\label{thm:colonisation} \mbox{Volunteer trees. Trees arising from natural colonisation rather than having been planted}$

White-rot. A range of kinds of wood decay in which lignin, usually together with cellulose and other wood constituents, is degraded

Wind exposure. The degree to which a tree or other object is exposed to wind, both in terms of duration and velocity

Wind pressure. The force exerted by a wind on a particular object $% \left(1\right) =\left(1\right) \left(1\right) \left$

Windthrow. The blowing over of a tree at its roots

Wound dressing. A general term for sealants and other materials used to cover wounds in the hope of protecting them against desiccation and infection; only of proven value against fresh wound parasites

Woundwood. Wood with atypical anatomical features, formed in the vicinity of a wound $% \left(1\right) =\left(1\right) \left(1\right) \left($