


# Communal Space Door Types

## Type 11- Communal Lobby Door

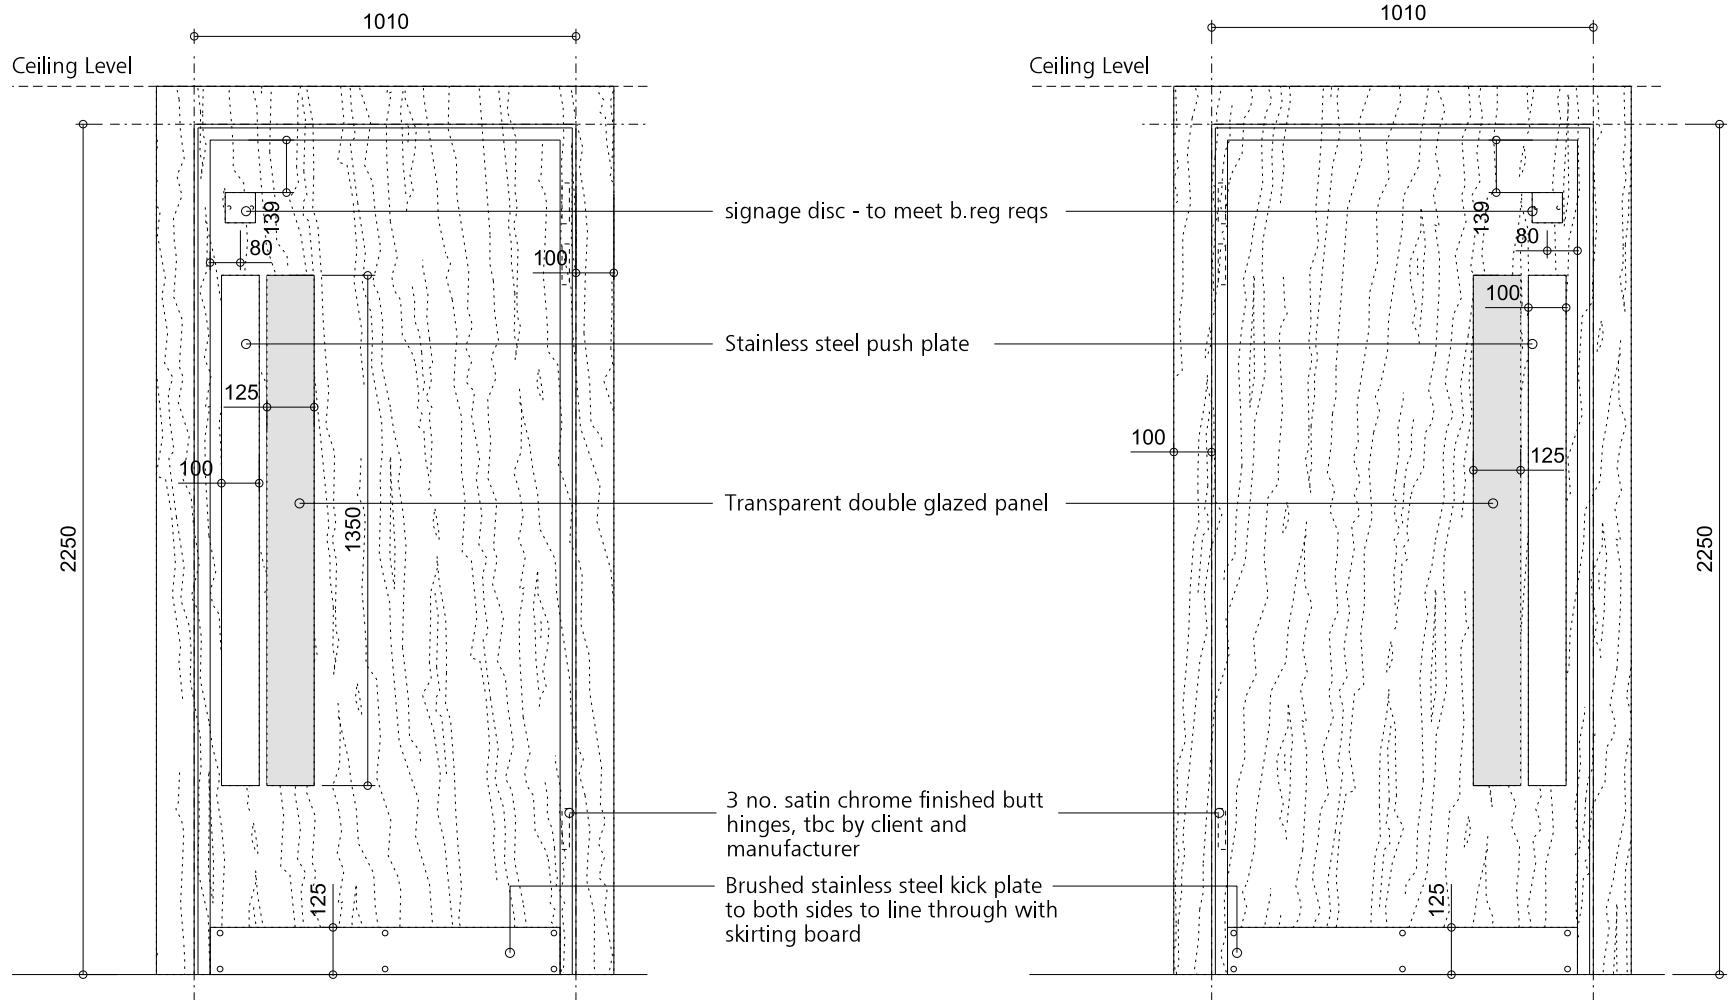

Communal lobby space door from corridors.  
For individual door requirements see door schedule.

Structural opening to be 2250(h)x1010(w).  
Door to be 2180(h)x726(w)x54(d) solidcore door with a fd60s rating as schedule. Laminated walnut veneer face with horizontal grooves and matching h.w lippings to all edges. 100mm laminated walnut veneered surround to match door.  
Acoustic specification: to comply with building regs.

Internal frames and architraves to be mdf paint finish. For information on which doors require a threshold strip refer to floor finishes drawings (P13-063-03-040) 001 to 004.


Apartment entrance door from corridors.  
For individual door requirements see door schedule.

Structural opening to be 2250(h)x1010(w).  
Door to be 2180(h)x726(w)x54(d) solidcore door with a fd60s rating as schedule. Laminated walnut veneer face with horizontal grooves and matching h.w lippings to all edges. 100mm laminated walnut veneered surround to match door.  
Acoustic specification: to comply with building regs.

Suitable door closers to be fitted, tbc by client. All signage to meet the relevant building regulations.

Internal frames and architraves to be mdf paint finish

## Type 12- Riser Door 1

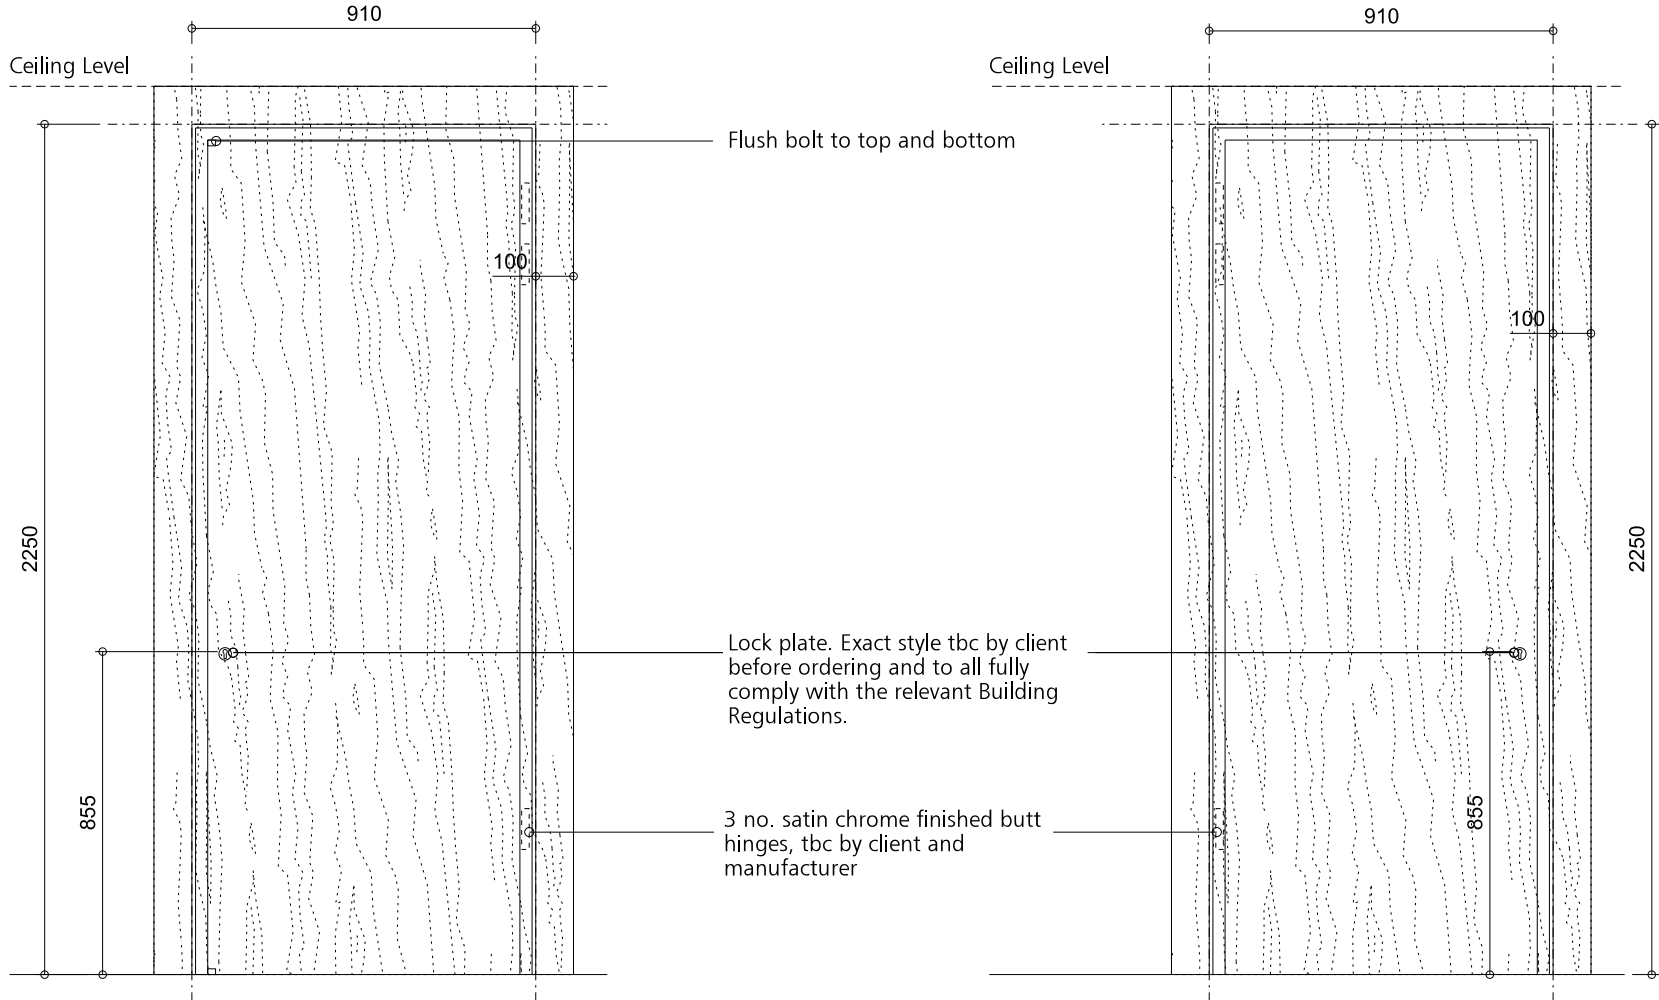

Riser door (Type 1) with 60 minute fire protection.  
For individual door requirements see door schedule.

Structural opening to be 2250(h)x910(w).  
Door to be 2180(h)x826(w)x54(d) solidcore door with a fd60s rating as schedule. Laminated walnut veneer face with matching h.w lippings to all edges. 100mm laminated walnut veneered surround to match door.  
Acoustic specification: to comply with building regs.


Internal frames and architraves to be mdf paint finish. For information on which doors require a threshold strip refer to floor finishes drawings (P13-063-03-040) 001 to 004.

Riser door (Type 1) with 60 minute fire protection.  
For individual door requirements see door schedule.

Structural opening to be 2250(h)x910(w).  
Door to be 2180(h)x826(w)x54(d) solidcore door with a fd60s rating as schedule. Laminated walnut veneer face with matching h.w lippings to all edges. 100mm laminated walnut veneered surround to match door.  
Acoustic specification: to comply with building regs.

Internal frames and architraves to be mdf paint finish

## Type 13- Riser Door 2

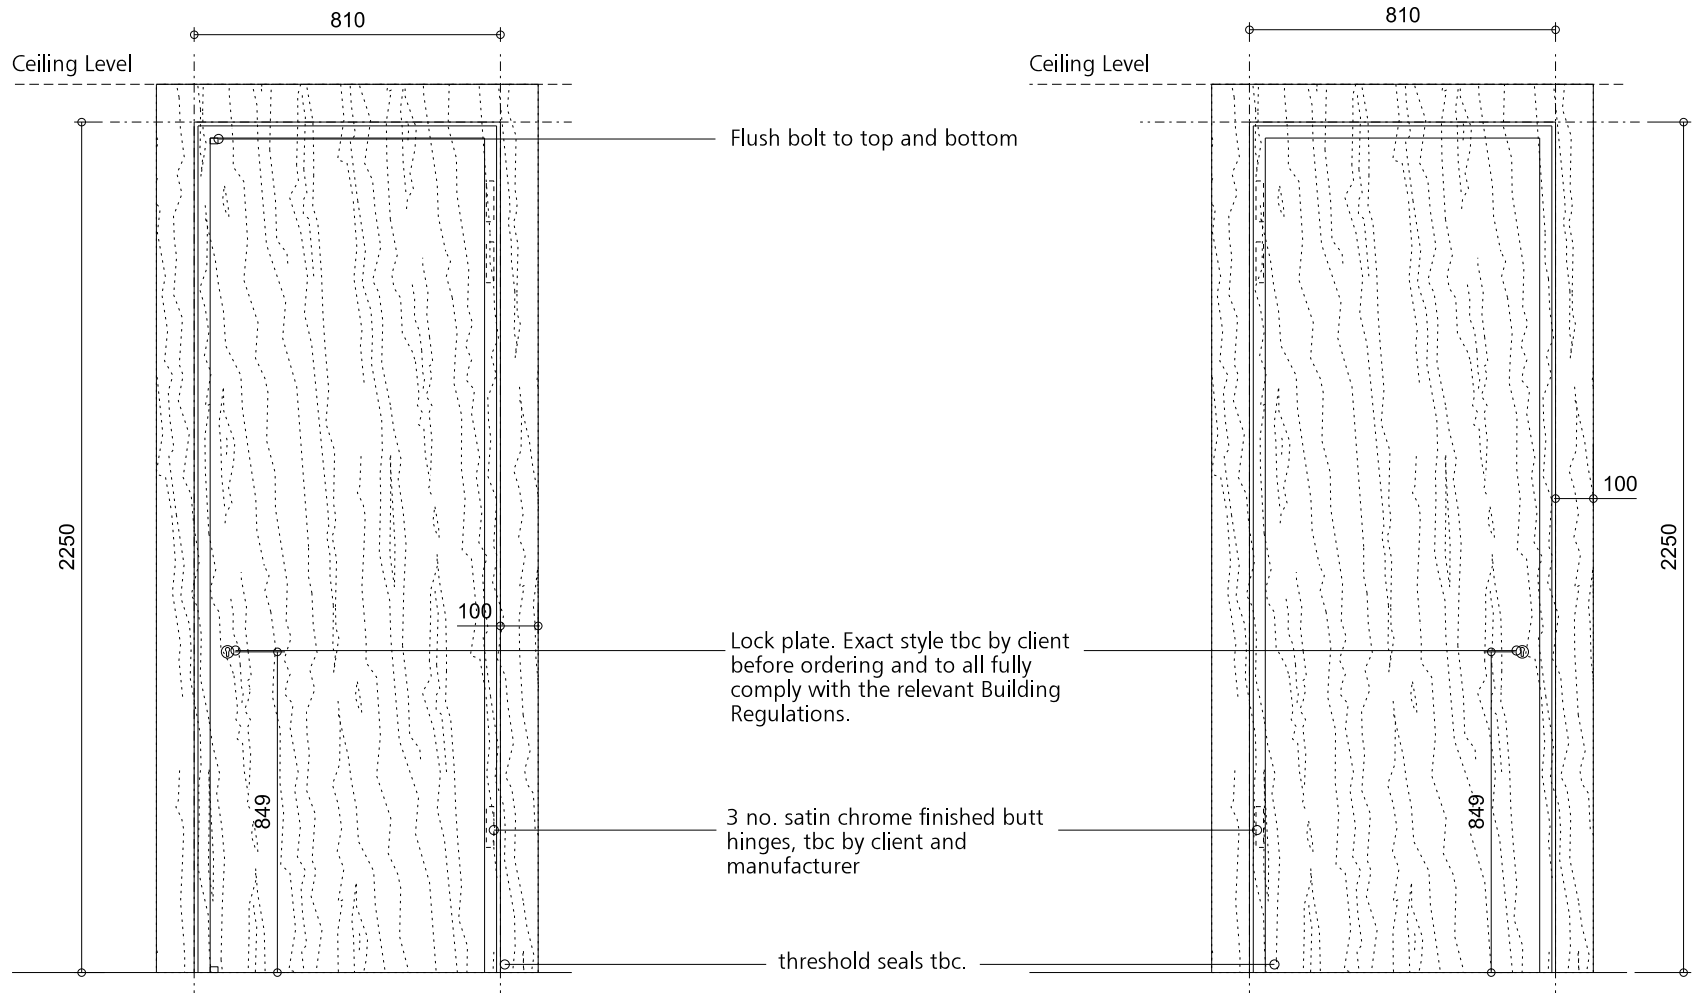

Riser door (Type 2) with 60 minute fire protection.  
For individual door requirements see door schedule.

Structural opening to be 2250(h)x810(w).  
Door to be 2180(h)x726(w)x54(d) solidcore door with a fd60s rating as schedule. Laminated walnut veneer face with matching h.w lippings to all edges. 100mm laminated walnut veneered surround to match door.  
Acoustic specification: to comply with building regs.


Internal frames and architraves to be mdf paint finish. For information on which doors require a threshold strip refer to floor finishes drawings (P13-063-03-040) 001 to 004.

Riser door (Type 2) with 60 minute fire protection.  
For individual door requirements see door schedule.

Structural opening to be 2250(h)x810(w).  
Door to be 2180(h)x726(w)x54(d) solidcore door with a fd60s rating as schedule. Laminated walnut veneer face with matching h.w lippings to all edges. 100mm laminated walnut veneered surround to match door.  
Acoustic specification: to comply with building regs.

Internal frames and architraves to be mdf paint finish

## Type 14- Riser Door 3

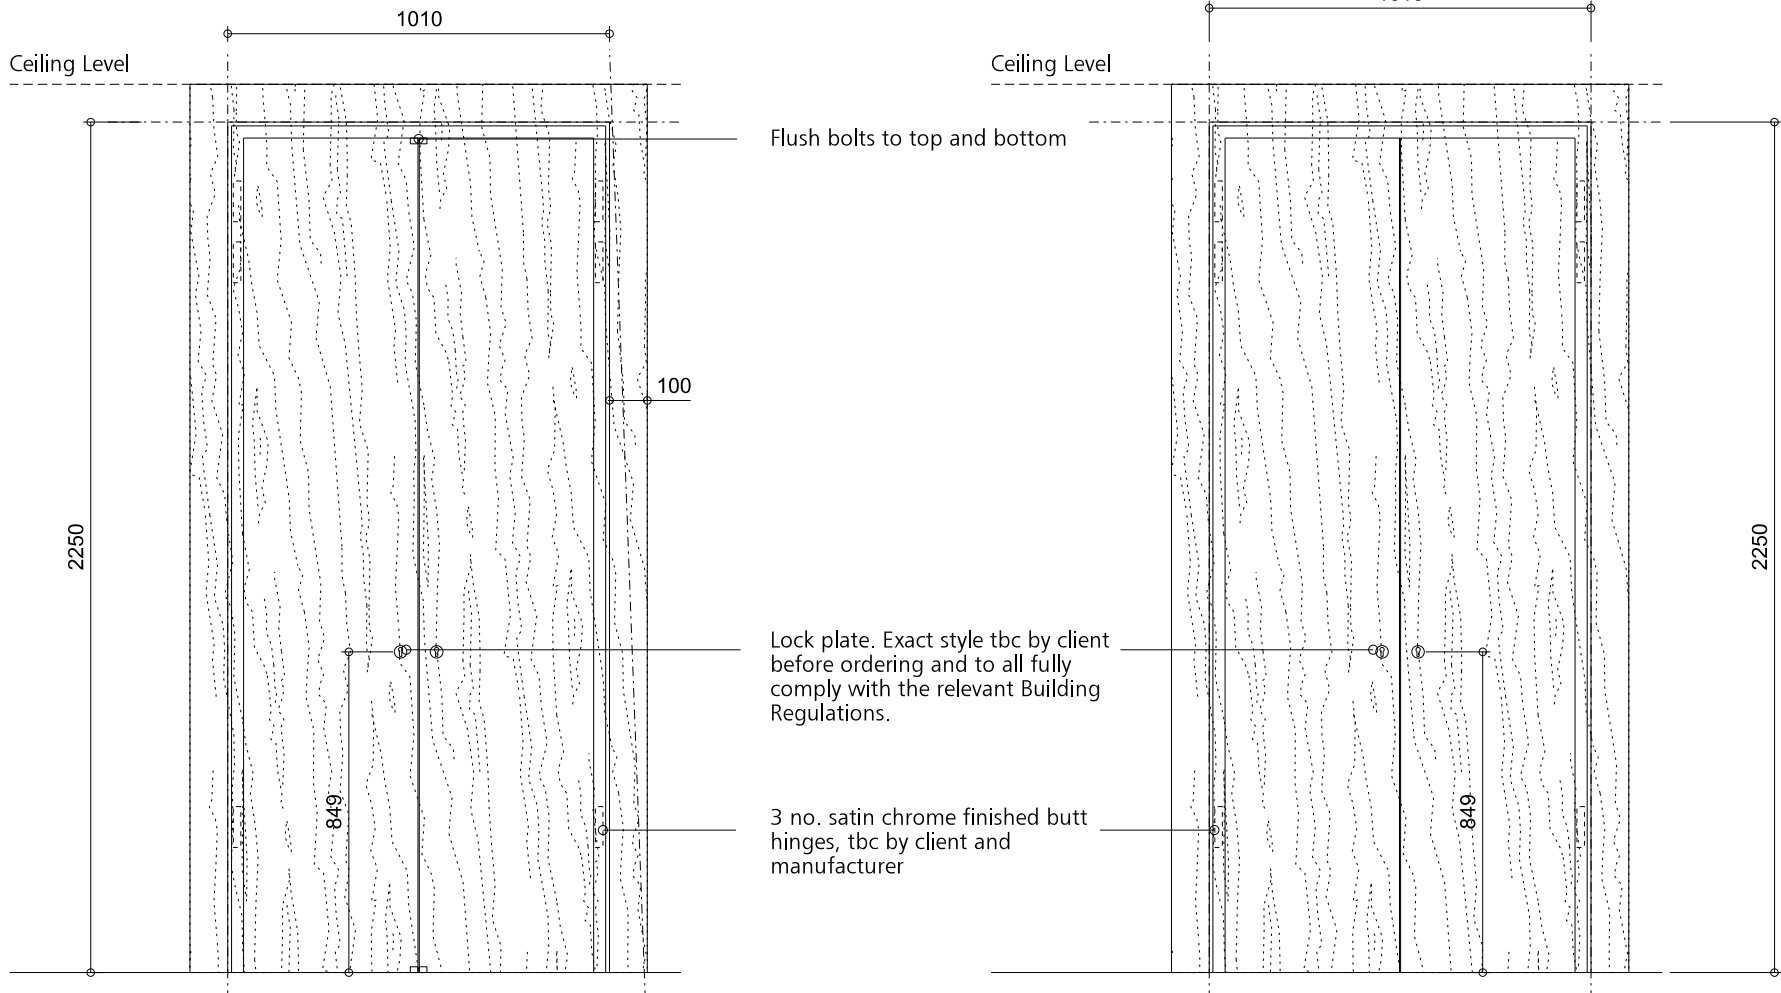

Internal apartment cupboard double-door.  
For individual door requirements see door schedule.

Structural opening to be 2250(h)x1010(w).  
Door to be 2180(h)x411.5(w) - to allow for a 3mm gap between doors - tbc before ordering)x54(d) solidcore door as schedule. Laminated walnut veneer face with matching h.w lippings to all edges. 100mm laminated walnut veneered surround to match door.  
Acoustic specification: to comply with building regs.

Internal frames and architraves to be mdf paint finish. For information on which doors require a threshold strip refer to floor finishes drawings (P13-063-03-040) 001 to 004.

Riser door (Type 3) with 60 minute fire protection.  
For individual door requirements see door schedule.

Structural opening to be 2250(h)x1010(w).  
Door to be 2180(h)x411.5(w) - to allow for a 3mm gap between doors - tbc before ordering)x54(d) solidcore door as schedule. Laminated walnut veneer face with matching h.w lippings to all edges. 100mm laminated walnut veneered surround to match door.  
Acoustic specification: to comply with building regs.

Internal frames and architraves to be mdf paint finish.

FOR CONSTRCTON

FALCONER  
CHESTER  
HALL



No 12 Temple Street, Liverpool, L2 5RH Telephone +44(0)151 243 5800  
5th Floor, 22 Soho Square, London, W1D 4NS Telephone +44(0) 203 137 7393

Project Title  
Chancery House, Liverpool  
Drawing Title  
New Door Types - Sheet 3  
Client  
Chancery House (Liverpool) LLP  
Drawn By  
JF  
Date  
Nov 2015  
Scale  
1:20 @ A1  
Project No.  
P13-063  
Drawing No.  
04-32-003  
www.fcharchitects.com  
© F.C.H.