


Circular straight silencer

SLU 50



Dimensions and sound data

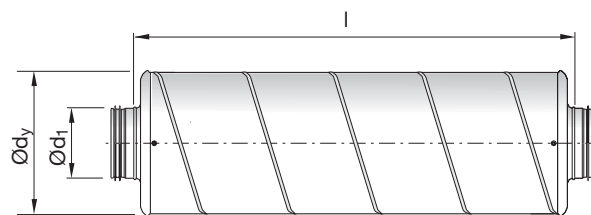


Description

Circular straight silencer.

Insulation thickness 50 mm (Ø 63–250).

Technical data

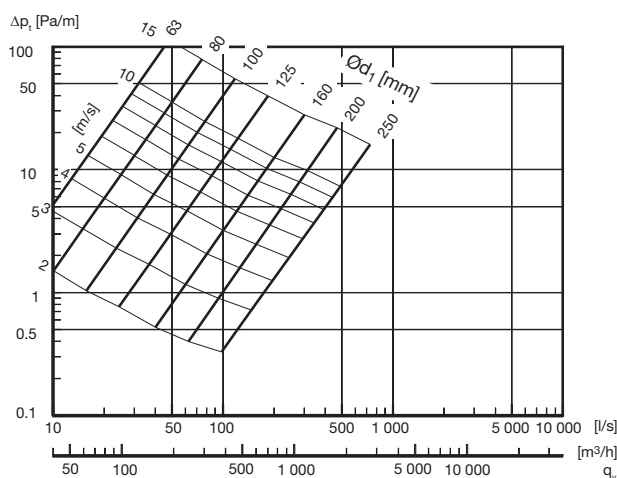

Ød ₁ nom	l mm	Attenuation [dB] for centre frequency [Hz]								Ød ₂ mm	m kg
		63	125	250	500	1k	2k	4k	8k		
63	300	0	6	13	21	32	44	36	26	170	1,75
63	600	0	7	20	35	50	50	50	34	170	2,95
80	300	1	5	8	15	25	25	21	15	190	2,00
80	600	2	8	14	28	49	50	47	24	190	3,00
80	900	3	10	21	40	50	50	50	34	190	5,00
80	1200	4	13	27	50	50	50	50	43	190	7,00
100	300	1	5	7	15	25	25	21	13	210	2,00
100	600	1	7	12	25	43	48	35	20	210	3,00
100	900	2	10	17	34	50	50	49	28	210	5,00
100	1200	3	12	22	44	50	50	50	35	210	7,00
125	300	0	4	5	13	23	20	16	11	235	3,00
125	600	1	5	10	22	39	37	26	16	235	4,00
125	900	1	7	14	30	50	50	37	21	235	7,00
125	1200	2	9	18	39	50	50	47	26	235	9,00
160	300	0	3	5	11	22	16	11	7	270	3,00
160	600	1	4	8	19	37	28	17	11	270	6,00
160	900	1	5	12	27	50	39	24	14	270	8,00
160	1200	2	6	15	35	50	50	30	17	270	10,0
200	300	0	2	4	9	19	11	7	5	325	4,00
200	600	1	3	8	15	28	19	12	8	325	7,00
200	900	2	4	11	21	37	28	16	10	325	10,0
200	1200	2	5	14	27	46	36	21	13	325	12,0
250	600	1	2	6	14	26	14	8	7	365	9,00
250	900	1	3	9	19	38	19	11	9	365	12,0
250	1200	2	4	11	24	50	24	13	11	365	15,0

Order code

Product	SLU	aaa	bbbb	50
SLU				
Connection dim. Ød ₁				
63 - 250 mm				
Length in mm				
300 - 1200 mm				
Insulation thickness				
50				

Example: SLU - 63 - 600 - 50