


EXISTING WINDOWS

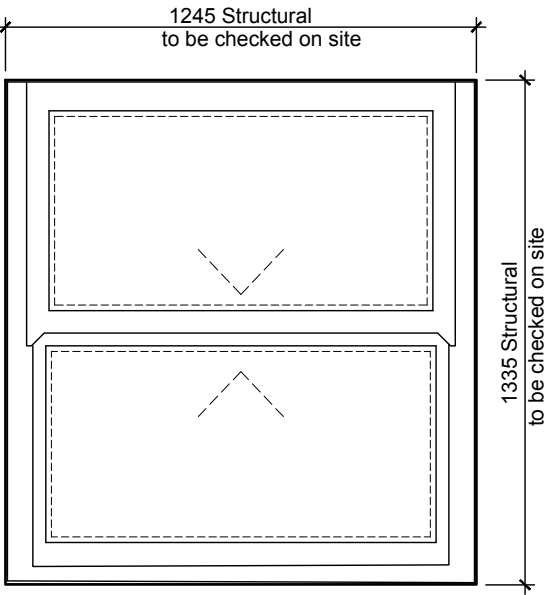

PROPOSED uPVC WINDOWS

GENERAL NOTES

Existing windows - timber due for replacement.

Preferred supplier - M & W

PVC-U Rosewood on White high impact mainframe and sashes with metal reinforcements (as required) of extruded profiles to BS 7413:1991 with double glazed 28mm sealed units.

All opening lights to be installed with tamper proof restrictors to the approval of Whitbread.

Opening windows to incorporate proprietary factory fitted weather strip grooved into frame.

Provide mdf internal window boards with paint finish. Allow for pointing all around externally with silicone sealant.

All glazing within 300mm of door opening, including glazing to doors, and up to a height of 1500mm for doors and in windows below 800 mm to be laminated safety glass to BS 6206: 1981 Specification for impact performance requirements for flat safety glass and safety plastics for use in buildings and marked with the BS kite mark accordingly.

Provide and fix trickle ventilation to heads of windows to provide 8000 sq mm of free air flow as background ventilation.

Opening casements to be fitted with casement fasteners which must be located on the bottom of the frame section between 800-1000mm above FFL to conform with Part M - Building Regs.

Provision for maintenance and window cleaning subject to designer site specific risk assessments and Whitbread approval.



Indicates WINDOW to be replaced.  
Opening structure to remain intact.  
Site survey required to verify dimensions.



Revision:  
PROPOSED ALTERATIONS  
at Liverpool - West Derby  
for PREMIER INN

WINDOW SPECIFICATION

Drawn:	Spenser Taffs
Date:	08/04/2016
Scale:	1:20 @ A2
Status:	Planning
Dwg No.	63:16:02