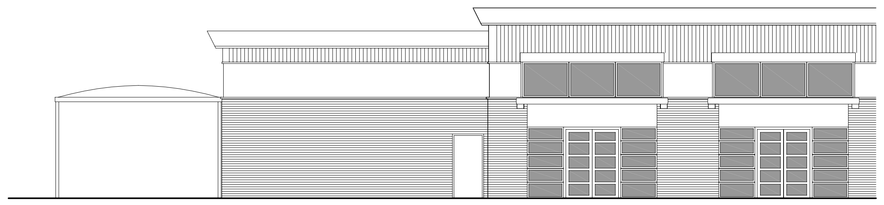

ELEVATION A

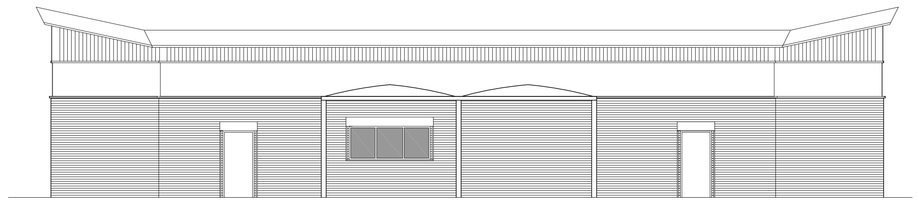

ELEVATION B

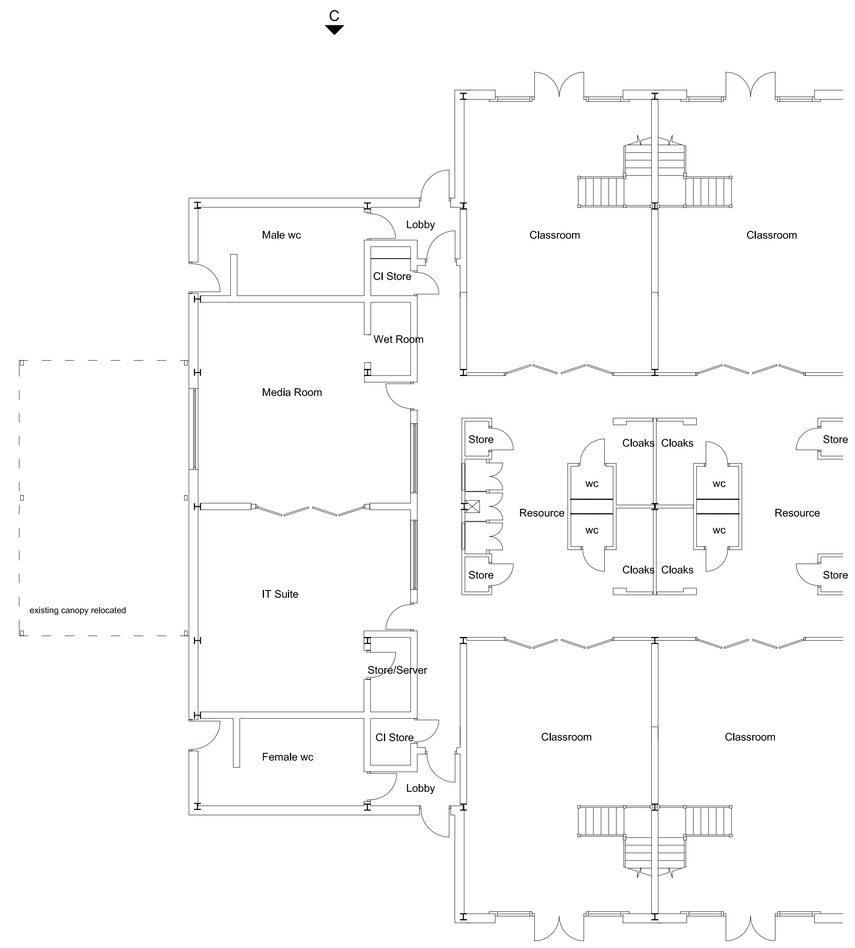

PART PLAN

ELEVATION C

AREA 'A' AS PROPOSED

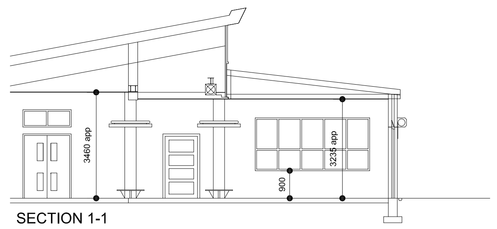

SECTION 1-1

ELEVATION A

ELEVATION B

ELEVATION C

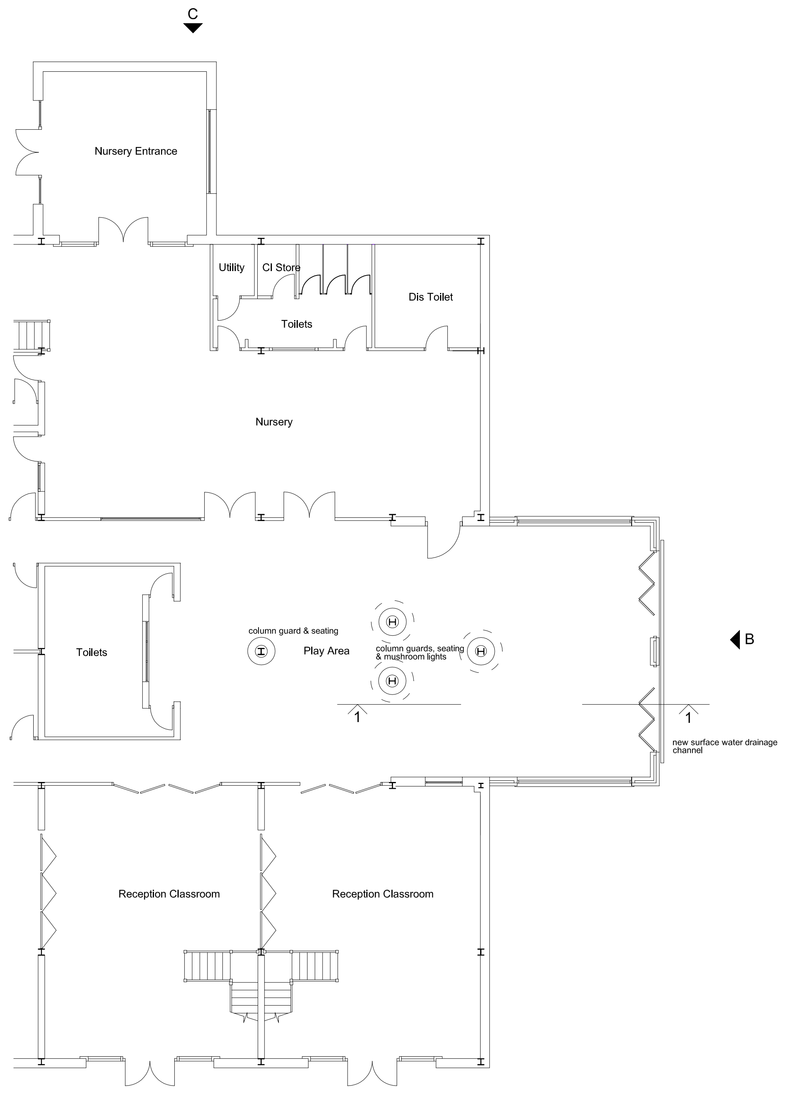

PART PLAN

PROPOSED EXTENSION

WALLS:
NEW BRICKWORK TO EXTENSION TO MATCH EXISTING

ROOF TO EXTENSION
TO BE METAL PROFILE ROOFING TO MATCH EXISTING
& METAL SQUARE PROFILE RWP

WINDOWS
TO BE ALUMINIUM DOUBLE GLAZED. FINISH TO MATCH EXISTING

DOORS
NEW BI FOLD DOORS TO BE IN ALUMINIUM TO MATCH EXISTING
SIZE TO SUIT OPENING & BE COMPLIANT WITH
DOC L OF THE BUILDING REGULATIONS
TO HAVE MULTI POINT LOCKING SYSTEM

FASCIA'S
TO BE METAL WITH FINISH TO MATCH EXISTING
MAIN SCHOOL BUILDING

ROLLER SHUTTERS
ALL NEW DOORS AND WINDOWS TO PROPOSED EXTENSION
TO HAVE ROLLER SHUTTERS
TO BE SURFACE MOUNTED WITH FINISH TO MATCH EXISTING

DRAINAGE CHANNEL
EXISTING DRAINAGE CHANNEL TO BE REMOVED AND NEW
SURFACE WATER DRAINAGE CHANNEL INSTALLED
TO AREA OF NEW DOORS

AREA 'B' AS PROPOSED

Anthony Shipley Building Consultancy Ltd
238 SOUTHPORT ROAD. ORMSKIRK. TEL: 07881 647113

KENSINGTON PRIMARY SCHOOL
BRAE STREET. LIVERPOOL

AREA 'A' & AREA 'B' AS PROPOSED

Scale	1:100	Drawing Number	
Drawn	AS	KP.003	
Date	DECEMBER 2015		

A0